



U.S. Department  
of Transportation  
**Pipeline and  
Hazardous Materials  
Safety Administration**

**COMPETENT AUTHORITY CERTIFICATION  
FOR A TYPE B(U)F FISSILE  
RADIOACTIVE MATERIALS PACKAGE DESIGN  
CERTIFICATE USA/9204/B(U)F-96, REVISION 4**

East Building, PHH-23  
1200 New Jersey Avenue Southeast  
Washington, D.C. 20590

This certifies that the radioactive material package design described has been certified by the Competent Authority of the United States as meeting the regulatory requirements for a Type B(U)F packaging for fissile radioactive material as prescribed in the regulations of the International Atomic Energy Agency<sup>1</sup> and the United States of America<sup>2</sup>.

1. Package Identification - Model 10-160B.
2. Package Description and Authorized Radioactive Contents - as described in U.S. Nuclear Regulatory Commission Certificate of Compliance No. 9204, Revision 20 (attached).
3. Criticality - The minimum criticality safety index is 0.0. The maximum number of packages per conveyance is determined in accordance with Table X of the IAEA regulations cited in this certificate.
4. General Conditions -
  - a. Each user of this certificate must have in his possession a copy of this certificate and all documents necessary to properly prepare the package for transportation. The user shall prepare the package for shipment in accordance with the documentation and applicable regulations.
  - b. Each user of this certificate, other than the original petitioner, shall register his identity in writing to the Office of Hazardous Materials Technology, (PHH-23), Pipeline and Hazardous Materials Safety Administration, U.S. Department of Transportation, Washington D.C. 20590-0001.
  - c. This certificate does not relieve any consignor or carrier from compliance with any requirement of the Government of any country through or into which the package is to be transported.

---

<sup>1</sup> "Regulations for the Safe Transport of Radioactive Material, 1996 Edition (Revised), No. TS-R-1 (ST-1, Revised)," published by the International Atomic Energy Agency (IAEA), Vienna, Austria.


<sup>2</sup> Title 49, Code of Federal Regulations, Parts 100-199, United States of America.

**CERTIFICATE USA/9204/B(U)F-96, REVISION 4**

- d. Records of Quality Assurance activities required by Paragraph 310 of the IAEA regulations<sup>1</sup> shall be maintained and made available to the authorized officials for at least three years after the last shipment authorized by this certificate. Consignors in the United States exporting shipments under this certificate shall satisfy the applicable requirements of Subpart H of 10 CFR 71.
5. Marking and Labeling - The package shall bear the marking USA/9204/B(U)F-96 in addition to other required markings and labeling.
6. Expiration Date - This certificate expires on October 31, 2015.

This certificate is issued in accordance with paragraph 814 of the IAEA Regulations and Section 173.471 and 173.472 of Title 49 of the Code of Federal Regulations, in response to the August 28, 2012 petition by Energy Solutions, Columbia, SC, and in consideration of other information on file in this Office.

Certified By:

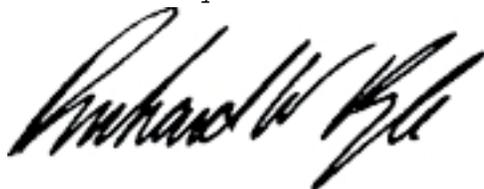

Dr. Magdy El-Sibaie  
Associate Administrator for Hazardous Materials Safety

**Oct 25 2012**  
(DATE)

Revision 4 - issued to endorse U.S. Nuclear Regulatory Commission Certificate of Compliance No. 9204, Revision 20.

**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGES
9204	20	71-9204	USA/9204/B(U)F-96	1 OF	5

2. PREAMBLE

- a. This certificate is issued to certify that the package (packaging and contents) described in Item 5 below meets the applicable safety standards set forth in Title 10, Code of Federal Regulations, Part 71, "Packaging and Transportation of Radioactive Material."  
This certificate does not relieve the consignor from compliance with any requirement of the regulations of the U.S. Department of Transportation or
- b. other applicable regulatory agencies, including the government of any country through or into which the package will be transported.

3. THIS CERTIFICATE IS ISSUED ON THE BASIS OF A SAFETY ANALYSIS REPORT OF THE PACKAGE DESIGN OR APPLICATION

- a. ISSUED TO (*Name and Address*)  
EnergySolutions Services, Inc.  
Suite 100, Center Point II  
100 Center Point Circle  
Columbia, SC 29210
- b. TITLE AND IDENTIFICATION OF REPORT OR APPLICATION  
EnergySolutions application dated January 24, 2011,  
as supplemented.

4. CONDITIONS

This certificate is conditional upon fulfilling the requirements of 10 CFR Part 71, as applicable, and the conditions specified below.

5.

(a) Packaging

(1) Model No.: 10-160B

(2) Description

A cylindrical carbon steel and lead shielded shipping package, designed to transport radioactive waste material. The package is transported in the upright position and is equipped with steel encased, rigid polyurethane foam impact limiters on the top and bottom. The package has approximate dimensions, shielding, and weight as follows:

Package height	88 inches
Package outer diameter	78-1/2 inches
Package cavity height	77 inches
Package cavity diameter	68 inches
Overall package height, with impact limiters	130 inches
Overall package diameter, with impact limiters	102 inches
Lead shielding thickness	1-7/8 inches
Gross weight	
(packaging and contents)	72,000 lbs
Maximum total weight of contents, shoring, secondary containers, and optional shield insert	14,250 lbs

**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**

1.	a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGES
	9204	20	71-9204	USA/9204/B(U)F-96	2 OF	5

5.(a)(2) Description (Continued)

The packaging body consists of a 1-1/8-inch thick carbon steel (ASME SA516 or SA537) inner shell, a 1-7/8-inch thick lead gamma shield, and a 2-inch thick carbon steel outer shell (ASME SA516). The inner and outer shells are welded to a 5-1/2-inch thick carbon steel bottom plate. The packaging cavity has an optional 11-gage stainless steel liner. A 12-gage stainless steel thermal shield surrounds the cask outer shell in the region between the impact limiters. The impact limiters are secured to each other around the cask by eight ratchet binders.

The packaging lid is a 5-1/2-inch thick carbon steel plate, and has a 31-inch diameter opening equipped with a secondary lid. The primary lid is sealed with a double elastomer O-ring and 24 equally spaced 1-3/4-inch diameter bolts. The secondary lid is 46 inches in diameter, is centered within the primary lid, and is sealed to the primary lid by a double elastomer O-ring and 12 equally spaced 1-3/4-inch diameter bolts. The space between the double O-ring seals is provided with a test port for leak testing the primary and secondary lid seals.

The secondary lid is protected by a thermal shield which consists of two polished stainless steel plates separated by a thin air gap. The thermal shield is attached to the secondary lid lifting lugs with hitch-pins. The optional drain and vent ports are sealed with a plug and an O-ring seal.

The package is equipped with four tie-down lugs welded to the cask outer shell. Two lifting lugs and two redundant lifting lugs are removed during transport. The lid is equipped with three lifting lugs which are covered by the top impact limiter and rain cover during transport.

An optional carbon steel shield insert may be used within the cask cavity for contents as specified in Condition No. 5(b)(1)(i) through (v). For contents specified in Condition No. 5(b)(1)(vi), a source insert shall be used. The source insert design weight is 8,000 lbs; it has side walls consisting of 6.0-inch thick lead, sandwiched between an inner 8 inches nominal SCH 40 steel pipe and an outer 24.0-inch SCH 60 steel pipe. The bottom of the source insert also consists of lead supported by a 0.75-inch thick steel base plate. The lid includes a steel encased lead plug, steel bolting plate and flat silicone rubber gasket.

(3) Drawings

The packaging is constructed and assembled in accordance with EnergySolutions Drawing No. C-110-D-29003-010, sheets 1 through 5, Rev. 16.

The Secondary Lid Thermal Shield is constructed in accordance with EnergySolutions Drawing No. DWG-CSK-12CV01-EG-0002-01, Rev. 3.

An optional shield insert is constructed in accordance with Chem-Nuclear Systems Drawing No. C-119-B-0018, Rev. 2.

**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGES
9204	20	71-9204	USA/9204/B(U)F-96	3 OF	5

The Source Insert Assembly is constructed in accordance with EnergySolutions Drawing No. C-038-145083-004, Rev.0.

The Source Insert Steel Cribbing is constructed in accordance with EnergySolutions Drawing No. C-038-145083-005, Rev. 0.

5.(b) Contents

(1) Type and form of material

- (i) Byproduct, source, and special nuclear material, non-fissile or fissile-excepted, as special form, or non-special form in the form of process solids or resins, either dewatered, solid, or solidified waste, in secondary containers; or
- (ii) Dewatered, solid or solidified transuranic-containing wastes (TRU), fissile or non-fissile or fissile-excepted, in secondary containers; or
- (iii) Plutonium 239 (Pu-239) as Pu-Be neutron sources meeting the requirements of special form sources; or
- (iv) Neutron activated metals or metal oxides in solid form in secondary containers; or
- (v) Miscellaneous radioactive solid waste materials, including special form materials and powdered solids, in secondary containers.
- (vi) Byproduct material as Co-60 loaded into the source insert.

(2) Maximum quantity of material per package

- (i) The maximum quantity of radioactive materials must be the lesser of the quantity determined by the methodology described in Attachment 1 to Chapter No. 7 of the application or 3000 A<sub>2</sub>, except for contents specified in Condition No. 5(b)(1)(vi) for which the limit is 10,000 Ci of Co-60.
- (ii) Fissile contents must be limited to the fissile gram equivalent of 325 grams of Pu-239, as determined using the conversion factors in Table 9.1.3, in Chapter No. 4, Appendix 4.10.2, of the application. Plutonium content exceeding 0.74 TBq (20 Ci) must be in solid form.
- (iii) TRU exceeding the fissile limits of 10 CFR 71.15 must not be machine-compacted and must have no more than 1% by weight of special reflectors and no more than 25% by volume of hydrogenous material.
- (iv) Neutron sources as described in 5(b)(1)(iii) are limited to a maximum emission rate of 1.1E+8 n/sec.

**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**

1.	a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGES
	9204	20	71-9204	USA/9204/B(U)F-96	4 OF	5

- (v) Maximum decay heat: 200 watts.
- (vi) Maximum weight of contents: 14,500 pounds including shoring, secondary containers, and either optional shield insert or mandatory source insert. The contents of the source insert have a maximum weight of 500 pounds.
- (vii) Explosives, corrosives, non-radioactive pyrophorics, and compressed gases are prohibited. Pyrophoric radionuclides may be present only in residual amounts less than 1 weight percent.
- (viii) The total amount of potentially volatile organic compounds present in the headspace of a secondary container is restricted to 500 parts per million.
- (ix) Powdered solid radioactive materials shall not include radioactive forms of combustible metal hydrides or combustible elemental metals, i.e., magnesium, titanium, sodium, potassium, lithium, zirconium, hafnium, calcium, zinc, plutonium, uranium, and thorium, or combustible non-metals, i.e., phosphorus.
- (x) Powdered solids contents with neutron emitters are not permitted.

5.(c) Criticality Safety Index 0.0

6. In addition to the requirements of Subpart G of 10 CFR Part 71:

- (a) The package must be prepared for shipment and operated in accordance with the Operating Procedures of Chapter No. 7 of the application.
- (b) Each packaging must meet the Acceptance Tests and Maintenance Program of Chapter No. 8 of the application.

7. Transport by air of fissile material is not authorized.

8. Flammable gas (hydrogen) concentration is limited to less than 5% in volume. For contents other than TRU waste, inerting is not allowed to limit the concentration of flammable gases. For TRU waste, compliance with the 5% hydrogen concentration limit is determined by the methods discussed in Appendix 4.10.2 of the application. For contents with a radioactivity concentration not exceeding that for Low Specific Activity material, the hydrogen concentration can be assumed to be less than 5% provided the package is shipped within 10 days of preparation, or within 10 days after venting of drums or other secondary containers.

9. Payload containers authorized for shipment of TRU waste are the 30-gallon and the 55-gallon drums. TRU waste characteristics are determined and limited in accordance with Appendix 4.10.2 of the application.

**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**


1.	a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGES
	9204	20	71-9204	USA/9204/B(U)F-96	5 OF	5

10. The non-homogeneity of the package contents may lead to elevated levels of radiation on the package surfaces. Radiation surveys must be performed to obtain measurements from all surfaces of the package, and from the outer surfaces of the vehicle enclosure, unless process knowledge or survey history indicates that elevated radiation levels are not likely to be encountered.
11. Appropriate devices or measures must secure contents in the secondary container, if necessary.
12. The package authorized by this certificate is hereby approved for use under the general license provisions of 10 CFR 71.17.
13. Expiration date: October 31, 2015.

REFERENCES

EnergySolutions application dated January 24, 2011.

Supplements dated April 6, September 9, and October 28, 2011; July 20, July 26 and August 10, 2012.

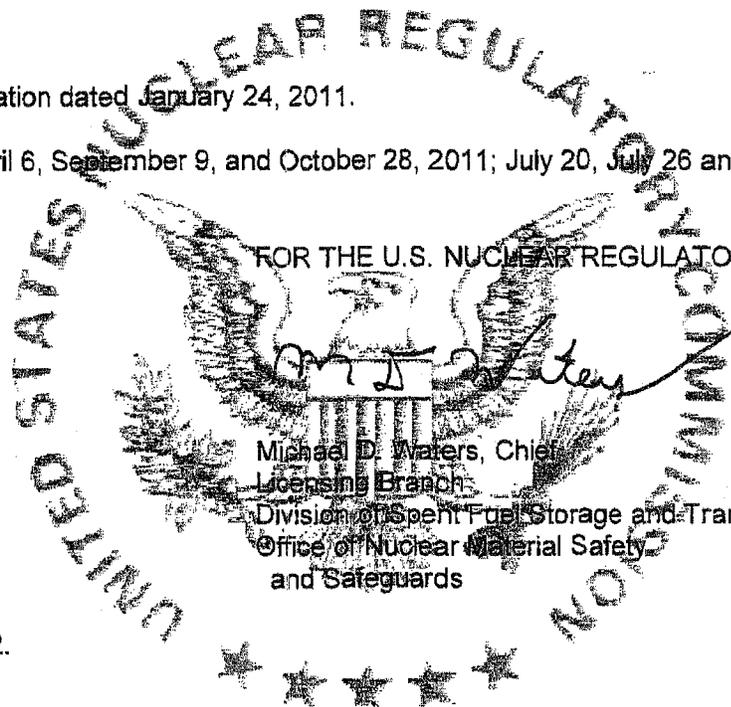

FOR THE U.S. NUCLEAR REGULATORY COMMISSION

*Michael D. Waters*

Michael D. Waters, Chief  
Licensing Branch  
Division of Spent Fuel Storage and Transportation  
Office of Nuclear Material Safety  
and Safeguards

Date: August 23, 2012.



U.S. Department  
of Transportation

East Building, PHH-23  
1200 New Jersey Avenue SE  
Washington, D.C. 20590

**Pipeline and  
Hazardous Materials  
Safety Administration**

**CERTIFICATE NUMBER:** USA/9204/B(U)F-96, Revision 4

**ORIGINAL REGISTRANT(S):**

Steven E. Sisley  
Licensing, Regulatory Compliance Manager  
Energy Solutions  
2105 South Bascom Ave.  
Suite 160  
Campbell, CA 95008

Brandon Thomas  
Licensing and Regulatory Compliance  
Energy Solutions  
2105 South Bascom Ave.  
Suite 160  
Campbell, CA 95008

Mr. Patrick Walsh  
Project Manager  
Energy Solutions  
1009 Commerce Park Dr.  
Suite 100  
Oak Ridge, TN 37830

Mr. Mark Whittaker  
Engineering and Licensing  
Energy Solutions  
140 Stoneridge Drive  
Columbia, SC 29210

Mr. Patrick Paquin  
GM - Engineering and Licensing  
Energy Solutions  
140 Stoneridge Drive  
Columbia, SC 29210