



U.S. Department
of Transportation
**Pipeline and
Hazardous Materials
Safety Administration**

**COMPETENT AUTHORITY CERTIFICATION
FOR A TYPE FISSILE
RADIOACTIVE MATERIALS PACKAGE DESIGN
CERTIFICATE USA/9297/AF-96, REVISION 4**

East Building, PHH-23
1200 New Jersey Avenue Southeast
Washington, D.C. 20590

This certifies that the radioactive material package design described has been certified by the Competent Authority of the United States as meeting the regulatory requirements for a Type AF packaging for fissile radioactive material as prescribed in the regulations of the International Atomic Energy Agency¹ and the United States of America².

1. Package Identification - Traveller STD and Traveller XL.
2. Package Description and Authorized Radioactive Contents - as described in U.S. Nuclear Regulatory Commission Certificate of Compliance No. 9297, Revision 5 (attached).
3. Criticality - The minimum criticality safety index is as assigned in the NRC Certificate of Compliance. The maximum number of packages per conveyance is determined in accordance with Table X of the IAEA regulations cited in this certificate.
4. General Conditions -
 - a. Each user of this certificate must have in his possession a copy of this certificate and all documents necessary to properly prepare the package for transportation. The user shall prepare the package for shipment in accordance with the documentation and applicable regulations.
 - b. Each user of this certificate, other than the original petitioner, shall register his identity in writing to the Office of Hazardous Materials Technology, (PHH-23), Pipeline and Hazardous Materials Safety Administration, U.S. Department of Transportation, Washington D.C. 20590-0001.
 - c. This certificate does not relieve any consignor or carrier from compliance with any requirement of the Government of any country through or into which the package is to be transported.

¹ "Regulations for the Safe Transport of Radioactive Material, 1996 Edition (Revised), No. TS-R-1 (ST-1, Revised)," published by the International Atomic Energy Agency (IAEA), Vienna, Austria.


² Title 49, Code of Federal Regulations, Parts 100-199, United States of America.

CERTIFICATE USA/9297/AF-96, REVISION 4

- d. Records of Quality Assurance activities required by Paragraph 310 of the IAEA regulations¹ shall be maintained and made available to the authorized officials for at least three years after the last shipment authorized by this certificate. Consignors in the United States exporting shipments under this certificate shall satisfy the applicable requirements of Subpart H of 10 CFR 71.
5. Marking and Labeling - The package shall bear the marking USA/9297/AF-96 in addition to other required markings and labeling.
6. Expiration Date - This certificate expires on March 31, 2015. On June 30, 2013, this certificate supersedes all previous revisions of USA/9297/AF-96.

This certificate is issued in accordance with paragraph 814 of the IAEA Regulations and Section 173.471 and 173.472 of Title 49 of the Code of Federal Regulations, in response to the July 21, 2011 petition by Westinghouse, Columbia, SC, and in consideration of other information on file in this Office.

Certified By:

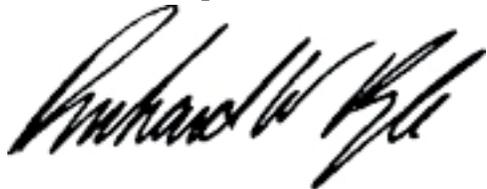

Dr. Magdy El-Sibaie
Associate Administrator for Hazardous Materials Safety

Sep 23 2011
(DATE)

Revision 4 - Issued to endorse NRC Certificate of Compliance No. 9297,
Revision 5.

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER 9297	b. REVISION NUMBER 5	c. DOCKET NUMBER 71-9297	d. PACKAGE IDENTIFICATION NUMBER USA/9297/AF-96	PAGE 1	PAGES OF 8
----------------------------------	-------------------------	-----------------------------	--	-----------	---------------

2. PREAMBLE

- a. This certificate is issued to certify that the package (packaging and contents) described in Item 5 below meets the applicable safety standards set forth in Title 10, Code of Federal Regulations, Part 71, "Packaging and Transportation of Radioactive Material."
- b. This certificate does not relieve the consignor from compliance with any requirement of the regulations of the U.S. Department of Transportation or other applicable regulatory agencies, including the government of any country through or into which the package will be transported.

3. THIS CERTIFICATE IS ISSUED ON THE BASIS OF A SAFETY ANALYSIS REPORT OF THE PACKAGE DESIGN OR APPLICATION

- | | |
|---|---|
| a. ISSUED TO (<i>Name and Address</i>)
Westinghouse Electric Company, LLC
P.O. Drawer R
Columbia, SC 29250 | b. TITLE AND IDENTIFICATION OF REPORT OR APPLICATION
Westinghouse Electric Company, LLC, application
dated June 17, 2011. |
|---|---|

4. CONDITIONS

This certificate is conditional upon fulfilling the requirements of 10 CFR Part 71, as applicable, and the conditions specified below.

5.

(a) Packaging

- (1) Model Nos.: Traveller STD and Traveller XL
- (2) Description

The Traveller package is designed to transport non-irradiated uranium fuel assemblies or rods with enrichment up to 5.0 weight percent. The package is designed to carry one fuel assembly or one container for loose rods. The package consists of three components: 1) an outerpack, 2) a clamshell, and 3) a fuel assembly or rod container.

The outerpack serves as the primary impact and thermal protection for the fuel assembly and also provides for lifting, stacking, and tie down during transportation. Two independent impact limiters consisting of two sections of foam of different densities sandwiched between three layers of sheet metal are integral parts of the outerpack. Polyethylene foam sheeting may be positioned between the clamshell and the lower outerpack to augment shock absorbing characteristics during routine transportation. A weather gasket between the mating surfaces of the upper and lower outerpack provides a seal to prevent rain from entering the package.

The clamshell protects the contents during routine handling and limits the rearrangement of the contents in the event of an accident. The clamshell consists of an aluminum "v" extrusion, two aluminum door extrusions, and a small access door. Each extruded aluminum door is connected to the "v" extrusion with piano-type hinges (continuous hinges). These

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER 9297	b. REVISION NUMBER 5	c. DOCKET NUMBER 71-9297	d. PACKAGE IDENTIFICATION NUMBER USA/9297/AF-96	PAGE 2	PAGES OF 8
----------------------------------	-------------------------	-----------------------------	--	-----------	---------------

5.(a)(2) Description (Continued)

doors are held closed with a latching mechanism and quarter-turn bolts. Neutron absorber plates are installed in each leg of the "v" extrusion and in each of the doors. The "v" extrusion and the bottom plate are lined with a cork rubber pad to cushion and protect the contents during normal handling and transport conditions. The clamshell is fastened to the lower outerpack using shock absorbing rubber mounts.

The Traveller package is designed to carry loose rods using a container or rod pipe. The rod pipe consists of a 15.2 cm (6 in.) standard 304 stainless steel, Schedule 40 pipe, and standard 304 stainless steel closures at each end. The closure is a 0.635 cm (0.25 in.) thick cover secured with Type 304 stainless steel hardware to a flange fabricated from 0.635 cm (0.25 in.) thick plate.

There are two models of the Traveller packaging, the Traveller STD and the Traveller XL.

Traveller STD:

Package gross weight	2,041 kilograms (kg) (4,500 pounds (lbs))
Packaging gross weight	1,293 kg (2,850 lbs)
Contents gross weight	748 kg (1,650 lbs)
Outer dimensions	
Length	500.4 cm (197 in.)
Width	68.8 cm (27.0 in.)
Height	99.8 cm (39.3 in.)

Traveller XL:

Package gross weight	2,313 kg (5,100 lbs)
Packaging gross weight	1,431 kg (3,155 lbs)
Contents gross weight	894 kg (1,971 lbs)
Outer dimensions	
Length	574 cm (226.1 in.)
Width	68.9 cm (27.1 in.)
Height	99.8 cm (39.3 in.)

(3) Drawings

The packagings are fabricated and assembled in accordance with the following Westinghouse Electric Company's Drawing Nos.:

- 10004E58, Rev. 6 (sheets 1-9)
- 10006E58, Rev. 5

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER 9297	b. REVISION NUMBER 5	c. DOCKET NUMBER 71-9297	d. PACKAGE IDENTIFICATION NUMBER USA/9297/AF-96	PAGE 3	PAGES OF 8
---	--------------------------------	------------------------------------	---	------------------	----------------------

5. (b) Contents (Type and Form of Material)

(1) Fuel Assembly

- (i) Unirradiated PWR uranium dioxide fuel assemblies with a maximum uranium-235 enrichment of 5.0 weight percent. The parameters of the fuel assemblies that are permitted are as follows:

Parameters for 14 x 14 Fuel Assemblies

Fuel Assembly Description	14 x 14	14 x 14	14 x 14
Fuel Assembly Type	W-STD	W-OFA	CE-1/CE-2
No. of Fuel Rods per Assembly	179	179	176
No. of Non-Fuel Rods	17	17	20
Nominal Guide Tube Wall Thickness	0.043 cm (0.017 in.)	0.043 cm (0.017 in.)	0.097 cm (0.038 in.)
Nominal Guide Tube Outer Diameter	1.369 cm (0.539 in.)	1.336 cm (0.526 in.)	2.822 cm (1.111 in.)
Nominal Pellet Diameter	0.929 cm (0.366 in.)	0.875 cm (0.344 in.)	0.956/0.966 cm (0.376/0.381 in.)
Nominal Clad Outer Diameter	1.072 cm (0.422 in.)	1.016 cm (0.400 in.)	1.118 cm (0.440 in.)
Nominal Clad Thickness	0.062 cm (0.024 in.)	0.062 cm (0.024 in.)	0.071/0.066 cm (0.028/0.026 in.)
Clad Material	Zirconium alloy	Zirconium alloy	Zirconium alloy
Nominal Assembly Envelope	19.70 cm (7.76 in.)	19.70 cm (7.76 in.)	20.60 cm (8.11 in.)
Nominal Lattice Pitch	1.412 cm (0.556 in.)	1.412 cm (0.556 in.)	1.473 cm (0.580 in.)


**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER 9297	b. REVISION NUMBER 5	c. DOCKET NUMBER 71-9297	d. PACKAGE IDENTIFICATION NUMBER USA/9297/AF-96	PAGE 4	PAGES OF 8
---	--------------------------------	------------------------------------	---	------------------	----------------------

5.(b)(1)(i) Fuel Assembly (Continued)

Parameters for 15 x 15 Fuel Assemblies

Fuel Assembly Description	15 x 15	15 x 15
Fuel Assembly Type	STD/OFA	B&W
No. of Fuel Rods per Assembly	204	208
No. of Non-Fuel Rods	21	17
Nominal Guide Tube Wall Thickness	0.043 cm (0.017 in.)	0.043 cm (0.017 in.)
Nominal Guide Tube Outer Diameter	1.387/1.354 cm(0.546/0.533 in.)	1.354 cm (0.533 in.)
Nominal Pellet Diameter	0.929 cm (0.366 in.)	0.929 cm (0.366 in.)
Nominal Clad Outer Diameter	1.072 cm (0.422 in.)	1.072 cm (0.422 in.)
Nominal Clad Thickness	0.062 cm (0.024 in.)	0.062 cm (0.024 in.)
Clad Material	Zirconium alloy	Zirconium alloy
Nominal Assembly Envelope	21.39 cm (8.42 in.)	21.66 cm (8.53 in.)
Nominal Lattice Pitch	1.430 cm (0.563 in.)	1.443 cm (0.568 in.)

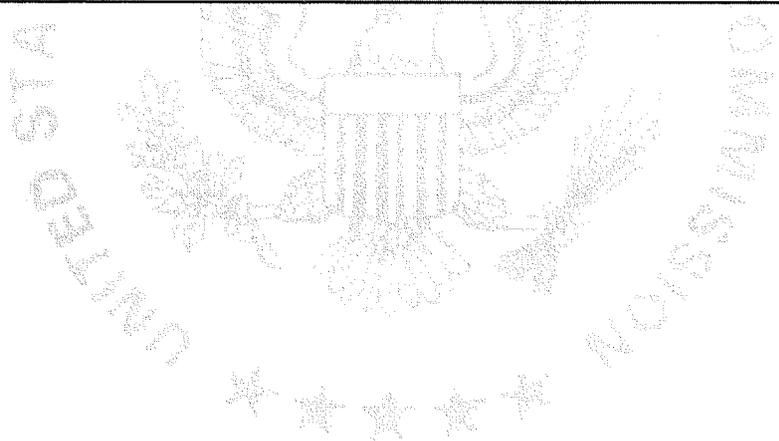

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER 9297	b. REVISION NUMBER 5	c. DOCKET NUMBER 71-9297	d. PACKAGE IDENTIFICATION NUMBER USA/9297/AF-96	PAGE 5	PAGES OF 8
---	--------------------------------	------------------------------------	---	------------------	----------------------

5.(b)(1)(i) Fuel Assembly (Continued)

Parameters for 16 x 16 Fuel Assemblies

Fuel Assembly Description	16 x 16					
Fuel Assembly Type	W-STD	NGF	ATOM	CE16NVA	CE16VA	CE16NGF
No. of Fuel Rods per Assembly	235	235	236	236	236	236
No. of Non-Fuel Rods	21	21	20	20	20	20
Nominal Guide Tube Wall Thickness	0.046 cm (0.018 in.)	0.041 cm (0.016 in.)	0.070 cm (0.028 in.)	0.102 cm (0.040 in.)	0.102 cm (0.040 in.)	0.102 cm (0.040 in.)
Nominal Guide Tube Outer Diameter	1.196 cm (0.471 in.)	1.204 cm (0.474 in.)	1.380 cm (0.543 in.)	2.489 cm (0.980 in.)	2.489 cm (0.980 in.)	2.489 cm (0.980 in.)
Nominal Pellet Diameter	0.819 cm (0.323 in.)	0.784 cm (0.309 in.)	0.911 cm (0.359 in.)	0.826 cm (0.325 in.)	0.827 cm (0.326 in.)	0.819 cm (0.323 in.)
Nominal Clad Outer Diameter	0.950 cm (0.374 in.)	0.914 cm (0.360 in.)	1.075 cm (0.423 in.)	0.970 cm (0.382 in.)	0.970 cm (0.382 in.)	0.950 cm (0.374 in.)
Nominal Clad Thickness	0.057 cm (0.023 in.)	0.057 cm (0.023 in.)	0.072 cm (0.029 in.)	0.064 cm (0.025 in.)	0.064 cm (0.025 in.)	0.057 cm (0.023 in.)
Clad Material	Zirconium alloy					
Nominal Assembly Envelope	19.72 cm (7.76 in.)	19.72 cm (7.76 in.)	22.95 cm (9.03 in.)	20.63 cm (8.12 in.)	20.63 cm (8.12 in.)	20.63 cm (8.12 in.)
Nominal Lattice Pitch	1.232 cm (0.485 in.)	1.232 cm (0.485 in.)	1.430 cm (0.563 in.)	1.285 cm (0.506 in.)	1.285 cm (0.506 in.)	1.285 cm (0.506 in.)

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER 9297	b. REVISION NUMBER 5	c. DOCKET NUMBER 71-9297	d. PACKAGE IDENTIFICATION NUMBER USA/9297/AF-96	PAGE 6	PAGES OF 8
---	--------------------------------	------------------------------------	---	------------------	----------------------

5.(b)(1)(i) Fuel Assembly (Continued)

Parameters for 17 x 17 and 18 x 18 Fuel Assemblies

Fuel Assembly Description	17 x 17	17 x 17	18 x 18
Fuel Assembly Type	W-STD/XL	W-OFA	ATOM
No. of Fuel Rods per Assembly	264	264	300
No. of Non-Fuel Rods	25	25	24
Nominal Guide Tube Wall Thickness	0.041/0.051 cm (0.016 /0.020 in.)	0.041 cm (0.016 in.)	0.065 cm (0.026 in.)
Nominal Guide Tube Outer Diameter	1.204/1.224/1.24 cm (0.474/0.482/0.488 in.)	1.204 cm (0.474 in.)	1.240 cm (0.488 in.)
Nominal Pellet Diameter	0.819 cm (0.323 in.)	0.784 cm (0.309 in.)	0.805 cm (0.317 in.)
Nominal Clad Outer Diameter	0.950 cm (0.374 in.)	0.914 cm (0.360 in.)	0.950 cm (0.374 in.)
Nominal Clad Thickness	0.057 cm (0.023 in.)	0.057 cm (0.023 in.)	0.064 cm (0.025 in.)
Clad Material	Zirconium alloy	Zirconium alloy	Zirconium alloy
Nominal Assembly Envelope	21.39 cm (8.42 in.)	21.39 cm (8.42 in.)	22.94 cm (9.03 in.)
Nominal Lattice Pitch	1.260 cm (0.496 in.)	1.260 cm (0.496 in.)	1.270 cm (0.500 in.)

- (ii) Non-fissile base-plate mounted core components, and spider-body core components, including secondary source rods and axial spacer assembly, are permitted.
- (iii) Primary neutron sources or other radioactive material are not permitted.
- (iv) Materials with moderating effectiveness greater than full density water are not permitted, except for polyethylene sleeves used to protect the fuel assemblies.
- (v) There is no restriction on the length of top and bottom annular blankets.
- (vi) Replacement of fuel rods with any number of solid stainless steel rods is permitted.

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER 9297	b. REVISION NUMBER 5	c. DOCKET NUMBER 71-9297	d. PACKAGE IDENTIFICATION NUMBER USA/9297/AF-96	PAGE 7	PAGES OF 8
---	--------------------------------	------------------------------------	---	------------------	----------------------

5.(b) (2) Loose Fuel Rods

Unirradiated uranium dioxide fuel rods with a maximum uranium-235 enrichment of 5.0 weight percent. Fuel rods shall be transported in the Traveller package inside a rod pipe as specified in Drawing 10006E58. The fuel rods shall meet the parametric requirements given below:

Parameter	Limit
Maximum Enrichment	5.0 weight percent uranium-235
Pellet diameter	0.508 – 1.524 cm (0.20 – 0.60 in.)
Maximum stack length	Up to rod container length
Cladding	Zirconium alloy
Integral absorber	Gadolinia, erbia, and boron
Wrapping or sleeving	Plastic or other material with moderating effectiveness no greater than full density water
Maximum number of rods per container	Up to rod container capacity

Wrapping or sleeving: Materials with moderating effectiveness greater than full density of water are not permitted, except for polyethylene sleeve used to protect the fuel rods.

5.(c) Criticality Safety Index

- (1) When transporting fuel assemblies: 0.7
- (2) When transporting loose rods in a rod container: 0.0

6. In addition to the requirements of Subpart G of 10 CFR Part 71:

- (a) The package must be prepared for shipment and operated in accordance with the Operating Procedures in Chapter 7 of the Traveller License Application, as supplemented.
- (b) Each packaging must be acceptance tested and maintained in accordance with the Acceptance Tests and Maintenance Program in Chapter 8 of the Traveller License Application, as supplemented.

7. The package authorized by this certificate is hereby authorized for use under the general license provisions of 10 CFR 71.17.

8. The package is not authorized by this certificate for air transport.

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGES
9297	5	71-9297	USA/9297/AF-96	8	OF 8

- 9. Revision No. 3 of this certificate may be used until June 30, 2013.
- 10. Expiration date: March 31, 2015.

REFERENCES


Westinghouse Electric Company, LLC, application dated June 17, 2011.

FOR THE U.S. NUCLEAR REGULATORY COMMISSION



Michael D. Waters, Chief
Licensing Branch
Division of Spent Fuel Storage and Transportation
Office of Nuclear Material Safety
and Safeguards

Date: July 6, 2011

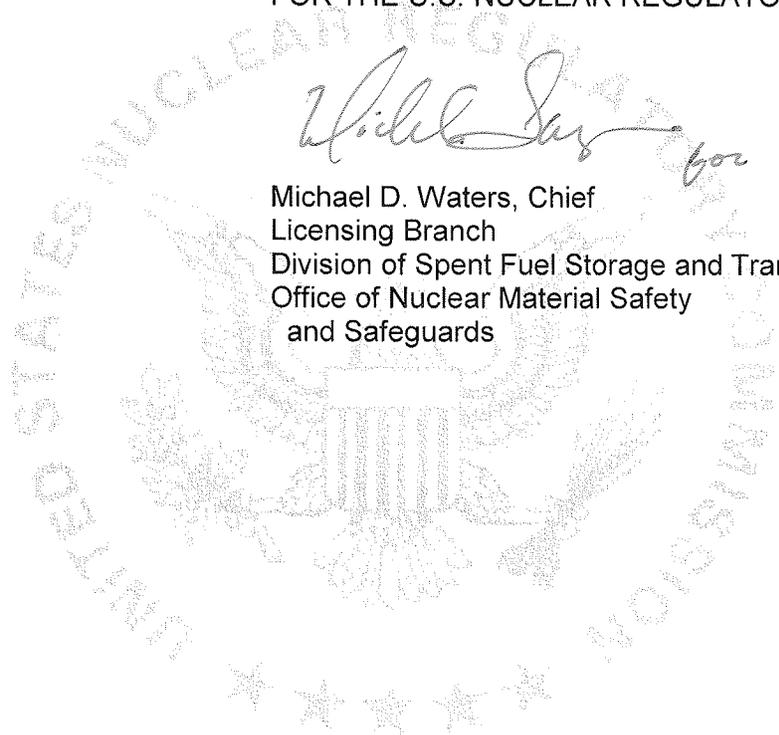



U.S. Department
of Transportation

East Building, PHH-23
1200 New Jersey Avenue SE
Washington, D.C. 20590

**Pipeline and
Hazardous Materials
Safety Administration**

CERTIFICATE NUMBER: USA/9297/AF-96, Revision 4

ORIGINAL REGISTRANT(S):

Wes Stilwell
Acting Manager - Licensing, Compliance, and Package Technology
Westinghouse
Westinghouse Electric Company - Nuclear Fuel
Columbia Fuel Site
P.O. Drawer R
Columbia, SC 29250