



U.S. Department
of Transportation

Pipeline and
Hazardous Materials
Safety Administration

East Building, PHH-23
1200 New Jersey Ave, SE
Washington, D.C. 20590

**COMPETENT AUTHORITY CERTIFICATION FOR A
TYPE FISSILE
RADIOACTIVE MATERIALS PACKAGE DESIGN
CERTIFICATE USA/0821/AF-96, REVISION 4**

The Competent Authority of the United States certifies that the radioactive material package design described in this certificate satisfies the regulatory requirements for a Type AF package for fissile material as prescribed in the regulations of the International Atomic Energy Agency¹ and the United States of America² The package design is approved for use within the United States for import and export shipments made in accordance with applicable international and domestic transport regulations.

1. Package Identification - ATR FFSC.
2. Package Description and Authorized Radioactive Contents - as described in U.S. Nuclear Regulatory Commission Certificate of Compliance No. 9330, Revision 14 (attached).
3. Criticality - The minimum criticality safety index is as assigned in the NRC Certificate of Compliance. The maximum number of packages per conveyance is determined in accordance with Table 11 of the IAEA regulations cited in this certificate.
4. General Conditions -
 - a. Each user of this certificate must have in his possession a copy of this certificate and all documents necessary to properly prepare the package for transportation. The user shall prepare the package for shipment in accordance with the documentation and applicable regulations.
 - b. Each user of this certificate, other than the original petitioner, shall register his identity in writing to the Office of Engineering and Research, (PHH-23), Pipeline and Hazardous

¹ "Regulations for the Safe Transport of Radioactive Material, 2012 Edition, No. SSR-6" published by the International Atomic Energy Agency (IAEA), Vienna, Austria.

² Title 49, Code of Federal Regulations, Parts 100-199, United States of America.

CERTIFICATE USA/0821/AF-96, REVISION 4

Materials Safety Administration, U.S. Department of Transportation, Washington D.C. 20590-0001.

- c. This certificate does not relieve any consignor or carrier from compliance with any requirement of the Government of any country through or into which the package is to be transported.
 - d. Records of Management System activities required by Paragraph 306 of the IAEA regulations¹ shall be maintained and made available to the authorized officials for at least three years after the last shipment authorized by this certificate. Consignors in the United States exporting shipments under this certificate shall satisfy the applicable requirements of Subpart H of 10 CFR 71.
5. Marking and Labeling - The package shall bear the marking USA/0821/AF-96 in addition to other required markings and labeling.
6. Expiration Date - This certificate expires on May 31, 2024. USA/0821/AF-96 Revision 3 may be used until December 31, 2020. All other revisions are not authorized for use.

This certificate is issued in accordance with paragraph(s) 816 of the IAEA Regulations and Section 173.471 and 173.472 of Title 49 of the Code of Federal Regulations, in response to the January 10, 2020 petition by Department of Energy, Washington, DC, and in consideration of other information on file in this Office.

Certified By:



William Schoonover
Associate Administrator for Hazardous
Materials Safety

January 17, 2020
(DATE)

Revision 4 - Issued to endorse U.S. Nuclear Regulatory Commission Certificate of Compliance USA/9330/AF-96, Revision 14.

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER 9330	b. REVISION NUMBER 14	c. DOCKET NUMBER 71-9330	d. PACKAGE IDENTIFICATION NUMBER USA/9330/AF-96	PAGE 1	PAGE OF 6
---	---------------------------------	------------------------------------	---	------------------	---------------------

2.. PREAMBLE

a. This certificate is issued to certify that the package (packaging and contents) described in Item 5 below meets the applicable safety standards set forth in Title 10, Code of Federal Regulations, Part 71, "Packaging and Transportation of Radioactive Material."

b. This certificate does not relieve the consignor from compliance with any requirement of the regulations of the U.S. Department of Transportation or other applicable regulatory agencies, including the government of any country through or into which the package will be transported.

3. THIS CERTIFICATE IS ISSUED ON THE BASIS OF A SAFETY ANALYSIS REPORT OF THE PACKAGE DESIGN OR APPLICATION

a. ISSUED TO (*Name and Address*)
U.S. Department of Energy
Washington, DC 20585

b. TITLE AND IDENTIFICATION OF REPORT OR APPLICATION
Safety Analysis Report, Advanced Test Reactor
Fresh Fuel Shipping Container, ATR FFSC, Revision
No. 14, dated May 2017, as supplemented.

4. CONDITIONS

This certificate is conditional upon fulfilling the requirements of 10 CFR Part 71, as applicable, and the conditions specified below.

5.

(a) Packaging

(1) Model No.: ATR FFSC

(2) Description

An insulated stainless steel package for the transport of unirradiated research reactor fuel, including intact fuel elements or fuel plates. The packaging consists of (1) a body, (2) a closure lid, and (3) inner packaging internals. The approximate dimensions and weights of the package are:

Overall package outer width and height	8 inches
Overall package length	73 inches
Cavity diameter	5-3/4 inches
Cavity length	68 inches
Packaging weight (without internals)	240 pounds
Maximum package weight (including internals and contents)	290 pounds

The body is composed of two thin-walled, stainless steel shells. The outer shell is a square tube with an 8-inch cross section, a 73-inch length, and a 3/16 inch wall thickness. The inner shell is a round tube with a 6-inch diameter and a 0.120-inch wall thickness. The inner tube is wrapped with ceramic fiber thermal insulation, overlaid with a stainless steel sheet. At the bottom end, the shells are welded to a 0.88-inch thick stainless steel base plate. At the top end (closure end), the shells are welded to a 1.5-inch thick stainless steel flange.

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGE
9330	14	71-9330	USA/9330/AF-96	2	OF 6

5.(a)(2) Description (Continued)

The closure is composed of circular stainless steel plates with ceramic fiber insulation. The closure engages the top end flange by way of four bayonets that are rotated and secured by two spring pins. The closure is equipped with a handle, which may be removed during transport. The closure does not have a gasket or seal.

The package internals consist of either a Fuel Handling Enclosure (FHE) for intact Advanced Test Reactor (ATR), Massachusetts Institute of Technology (MIT), University of Missouri Research Reactor (MURR), Conversion Of Belgian Reactor 2 – an Alternative (COBRA fuel-both HEU and LEU), or Rhode Island Nuclear Science Center (RINSC) fuel elements and Small Quantity Payloads, or a Loose Fuel Plate Basket for ATR fuel plates. The RINSC, MIT, MURR, COBRA, and Small Quantity Payload FHE use ball lock pins and end spacers to lock closed while the ATR FHE uses a spring plunger.

(3) Drawings

The packaging is constructed and assembled in accordance with the following Areva Federal Services LLC. or Packaging Technology, Inc., Drawing Nos.:

60501-10, Sheets 1-5, Rev. 3	ATR Fresh Fuel Shipping Container SAR Drawing
60501-20, Rev. 1	ATR Loose Plate Basket Assembly
60501-30, Rev. 1	ATR Fuel Handling Enclosure
60501-40, Rev. 0	MIT Fuel Handling Enclosure
60501-50, Rev. 0	MURR Fuel Handling Enclosure
60501-60, Rev. 0	RINSC Fuel Handling Enclosure
60501-70, Rev. 0	Small Quantity Payload Fuel Handling Enclosure
60501-90, Rev. 0	COBRA Fuel Handling Enclosure

(b) Contents

(1) Type and form of material

Unirradiated Mark IV, V, VI, and VII ATR fuel elements. The Mark IV fuel material is composed of U_3O_8 while the Mark V, VI, and VII ATR fuel material is composed of uranium aluminide (UAl_x). The uranium is enriched to a maximum 94 weight percent U-235; the maximum U-234 content is 1.2 weight percent; and the maximum U-236 content is 0.7 weight percent. Intact ATR fuel elements contain 19 curved fuel plates fitted within aluminum side plates, and the maximum channel thickness between fuel plates is 0.087 inch. The fuel meat thickness is a nominal 0.02 inch for all 19 plates, and the fuel meat width ranges from approximately 1.5 inches to 3.44 inches. The nominal active fuel length is approximately 48 inches. The maximum mass of U-235 per intact ATR fuel element is 1200 grams. The ATR fuel element must be contained within the ATR Fuel Handling Enclosure, as specified in 5(a)(3).

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGE
9330	14	71-9330	USA/9330/AF-96	3	OF 6

5.(b)(1) Type and Form of Material (continued)

Unirradiated ATR U-Mo fuel elements. The ATR U-Mo fuel element consists of a mixture of high-enriched uranium aluminide (UAl_x) fuel plates and low-enriched uranium and molybdenum alloy (U-Mo) fuel plates, with a maximum mass of U-235 per U-Mo fuel element of 1,240 grams. The ATR U-Mo fuel element contains 19 curved plates fitted within aluminum side plates; plates 1 through 4, and 16 through 18, contain high-enriched UAl_x fuel; plates 5 through 15 contain low-enriched U-Mo fuel; and plate 19 is an aluminum alloy plate. The maximum channel thickness between fuel plates is 0.087 inch. For the high-enriched UAl_x fuel plates, the uranium is enriched to a maximum 94 weight percent U-235; the maximum U-234 content is 1.2 weight percent; and the maximum U-236 content is 0.7 weight percent. For the low-enriched U-Mo fuel plates, the molybdenum content is a nominal 10 weight percent; the uranium is enriched to a maximum 20 weight percent U-235; the maximum U-234 content is 0.26 weight percent; and the maximum U-236 content is 0.46 weight percent. For the high-enriched UAl_x fuel plates, the fuel meat thickness is a nominal 0.02 inch; the fuel meat width ranges from approximately 1.5 inches to 3.44 inches; and the nominal active fuel length is approximately 48 inches. For the low-enriched U-Mo fuel plates, the fuel meat thickness is a nominal 0.013 inch, with a nominal 0.001 inch thick zirconium interlayer present between the fuel meat and the aluminum cladding layer; the fuel meat width ranges from approximately 2.25 inches to 3.28 inches; and the nominal active fuel length is approximately 48 inches. The ATR U-Mo fuel element must be contained within the ATR Fuel Handling Enclosure, as specified in 5(a)(3).

Unirradiated MIT fuel element. The MIT fuel material is composed of uranium aluminide (UAl_x). The uranium is enriched to a maximum of 94 weight percent U-235; the maximum U-234 content is 1.2 weight percent; and the maximum U-236 content is 0.7 weight percent. Each MIT fuel element contains 15 flat fuel plates fitted within aluminum side plates and the maximum channel thickness between fuel plates is 0.090 inch. The fuel meat thickness is a nominal 0.03 inch for all 15 plates and the fuel meat width ranges from approximately 1.98 inches to 2.17 inches. The nominal active fuel length is 22.375 inches. The maximum mass of U-235 per intact MIT fuel element is 515 grams. The MIT fuel element must be contained within the MIT Fuel Handling Enclosure, as specified in 5(a)(3).

Unirradiated MURR fuel element. The MURR fuel material is composed of uranium aluminide (UAl_x). The uranium is enriched to a maximum of 94 weight percent U-235; the maximum U-234 content is 1.2 weight percent; and the maximum U-236 content is 0.7 weight percent. Each MURR fuel element contains 24 curved fuel plates fitted within aluminum side plates and the maximum channel thickness between fuel plates is 0.090 inch. The fuel meat thickness is a nominal 0.02 inch for all 24 plates and the fuel meat width ranges from approximately 1.71 inches to 5.72 inches. The nominal active fuel length is 24 inches. The maximum mass of U-235 per intact MURR fuel element is 785 grams. The MURR fuel element must be contained within the MURR Fuel Handling Enclosure, as specified in 5(a)(3).

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGE
9330	14	71-9330	USA/9330/AF-96	4	OF 6

5.(b)(1) Type and Form of Material (continued)

Small Quantity Payloads where the maximum mass of U-235 is 400 grams and maximum U-235 enrichment is 94 weight percent. The Small Quantity Payload must be in the form of unirradiated foils, fuel plates or fuel elements and miscellaneous non-fueled associated components. The Small Quantity Payload must not include beryllium, carbon, deuterium, or materials with a hydrogen density greater than that of water, except as specified in 6. The Small Quantity Payload must be contained within the Small Quantity Payload Fuel Handling Enclosure, as specified in 5(a)(3), except the RINSC fuel element must be contained within the RINSC Fuel Handling Enclosure, as specified in 5(a)(3). Aluminum plates, shapes, and sheets, miscellaneous steel or aluminum fasteners, and cellulosic material such as cardboard may be used as dunnage to fill gaps between the small quantity payloads and the small quantity FHE. Loose plates may be separated by craft paper and taped or wire tied together. Dunnage shall be used to limit motion of the small quantity payload within the FHE to 1/4" or less. 1/8" neoprene strips may be used between the small quantity FHE and small quantity payloads and/or between the optional aluminum dunnage and the small quantity payload. The 1/8" neoprene strips shall not be stacked in more than two layers between the small quantity payload and any interior face of the small quantity FHE.

COBRA fuel element. The COBRA HEU fuel element is composed of uranium aluminide (UAl_x) dispersed in aluminum powder, with the uranium enriched to a maximum of 94 weight percent U-235. The COBRA LEU fuel element is composed of uranium silicide (U_3Si_2) dispersed in aluminum powder, with the uranium enriched to a maximum of 20 weight percent U-235. The maximum mass of U-235 is 410.3 grams in the HEU configuration or 435.8 grams in the LEU configuration. The COBRA fuel element weighs a maximum of 20 lb., is bagged, and must be contained within the COBRA Fuel Handling Enclosure, as specified in 5(a)(3).

Mark IV, V, VI, and VII ATR loose fuel plates: ATR loose plates may either be flat or curved and may be banded or wire-tied in a bundle. The ATR loose plate payload is limited to 600 grams of U-235. Additional aluminum plates may be used as dunnage to fill gaps between the fuel plates and the basket payload cavity. The fuel plates must be contained within the ATR Loose Fuel Plate Basket, as specified in 5(a)(3).

(2) Maximum quantity of material per package

The maximum total weight of contents and internals, including dunnage and other secondary packaging, is 50 lbs. Radioactive contents are not to exceed a Type A quantity.

For intact ATR, ATR U-Mo, MURR, RINSC, COBRA, and MIT fuel elements: One fuel element.

For ATR loose fuel plates: A maximum of 600 grams U-235.

For Small Quantity Payloads: A maximum of 400 grams U-235.

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER 9330	b. REVISION NUMBER 14	c. DOCKET NUMBER 71-9330	d. PACKAGE IDENTIFICATION NUMBER USA/9330/AF-96	PAGE 5	PAGE OF 6
----------------------------------	--------------------------	-----------------------------	--	-----------	--------------

(c) Criticality Safety Index (CSI):

For ATR, ATR U-Mo, MURR, MIT fuel elements or ATR loose fuel plates: 4.0

For Small Quantity Payloads: 25

For COBRA fuel elements: 4.0

6. Fuel elements and fuel plates may be bagged or wrapped in polyethylene. The maximum weight of the polyethylene wrap and tape shall not exceed 100 grams per package. The maximum weight of neoprene plus cellulosic material shall not exceed 4 kg per package.
7. Types of small quantity payloads cannot be mixed in a single Fuel Handling Enclosure.
8. Air transport of fuel elements or loose plates is authorized.
9. In addition to the requirements of 10 CFR 71 Subpart G:
 - (a) The package must be loaded and prepared for shipment in accordance with the Package Operations in Section 7 of the application.
 - (b) The package must be tested and maintained in accordance with the Acceptance Tests and Maintenance Program in Section 8 of the application.
10. The package authorized by this certificate is hereby approved for use under the general license provisions of 10 CFR 71.17.
11. Revision No. 13 of this certificate may be used until December 31, 2020.
12. Expiration date: May 31, 2024.

**CERTIFICATE OF COMPLIANCE
FOR RADIOACTIVE MATERIAL PACKAGES**

1. a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGE
9330	14	71-9330	USA/9330/AF-96	6	OF 6

REFERENCES

Safety Analysis Report, Advanced Test Reactor Fresh Fuel Container (ATR FFSC), Revision 15, dated June 2019.


Amendment Request Letter, J. Shuler, U.S. Department of Energy to J. McKirgan, U.S. Nuclear Regulatory Commission, dated June 25, 2019.

FOR THE U.S. NUCLEAR REGULATORY COMMISSION



Daniel I. Doyle, Acting Chief
Storage and Transportation Licensing Branch
Division of Fuel Management
Office of Nuclear Material Safety
and Safeguards

Date: 12/23/2019

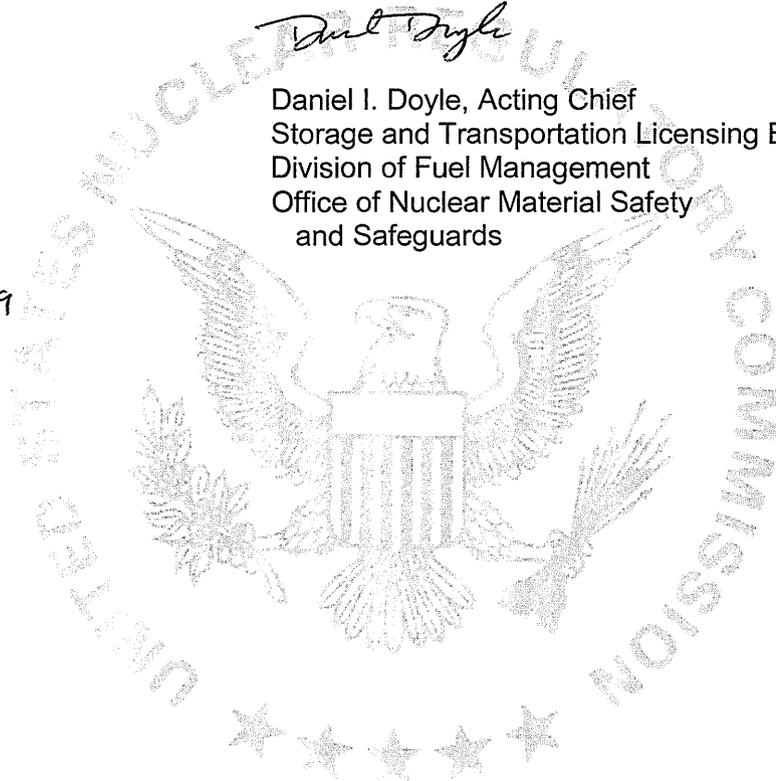



U.S. Department of
Transportation

**Pipeline and
Hazardous Materials
Safety Administration**

East Building, PHH-23
1200 New Jersey Ave, SE
Washington, D.C. 20590

CERTIFICATE NUMBER: USA/0821/AF-96

ORIGINAL REGISTRANT(S) :

Department of Energy
U.S. Department of Energy
1000 Independence Ave, SW
EM-60
Washington, DC, 20585
USA