



U.S. Department  
of Transportation  
**Pipeline and  
Hazardous Materials  
Safety Administration**

**COMPETENT AUTHORITY CERTIFICATION  
FOR A TYPE FISSILE  
RADIOACTIVE MATERIALS PACKAGE DESIGN  
CERTIFICATE USA/9248/AF, REVISION 26**

**East Building, PHH-23  
1200 New Jersey Avenue Southeast  
Washington, D.C. 20590**

This certifies that the radioactive material package design described has been certified by the Competent Authority of the United States as meeting the regulatory requirements for a Type AF packaging for fissile radioactive material as prescribed in the regulations of the International Atomic Energy Agency<sup>1</sup> and the United States of America<sup>2</sup>.

1. Package Identification - Model Nos. SP-1, SP-2 and SP-3.
2. Package Description and Authorized Radioactive Contents - as described in U.S. Nuclear Regulatory Commission Certificate of Compliance No. 9248, Revision 24 (attached).
3. Criticality - The minimum criticality safety index is as assigned in the attached NRC Certificate of Compliance. The maximum number of packages per conveyance is determined in accordance with Table X of the IAEA regulations cited in this certificate.
4. General Conditions -
  - a. Each user of this certificate must have in his possession a copy of this certificate and all documents necessary to properly prepare the package for transportation. The user shall prepare the package for shipment in accordance with the documentation and applicable regulations.
  - b. Each user of this certificate, other than the original petitioner, shall register his identity in writing to the Division of Engineering and Research, (PHH-20), Pipeline and Hazardous Materials Safety Administration, U.S. Department of Transportation, Washington D.C. 20590-0001.
  - c. This certificate does not relieve any consignor or carrier from compliance with any requirement of the Government of any country through or into which the package is to be transported.

---

<sup>1</sup> "Regulations for the Safe Transport of Radioactive Materials, 2012 Edition, No. SSR-6", published by the International Atomic Energy Agency (IAEA), Vienna, Austria.


<sup>2</sup> Title 49, Code of Federal Regulations, Parts 100-199, United States of America.

**CERTIFICATE USA/9248/AF, REVISION 26**

- d. Records of management system activities required by Paragraph 306 of the IAEA regulations shall be maintained and made available to the authorized officials for at least three years after the last shipment authorized by this certificate. Consignors in the United States exporting shipment under this certificate shall satisfy the applicable requirements of Subpart H of 10 CFR 71.
5. Marking and Labeling - The package shall bear the marking USA/9248/AF in addition to other required markings and labeling.
6. Expiration Date - This certificate expires on April 30, 2019. Revision 25 of this certificate may be used until December 31, 2017.

This certificate is issued in accordance with paragraphs 816 and 820 of the IAEA Regulations and Section 173.471 and 173.472 of Title 49 of the Code of Federal Regulations, in response to the January 9, 2017 petition by TN Americas LLC, Columbia, MD, and in consideration of other information on file in this Office.

Certified By:

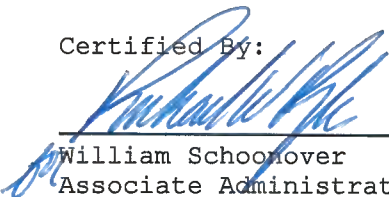

---

William Schoonover  
Associate Administrator for Hazardous Materials Safety

**JAN 18 2017**

---

(DATE)

Revision 26 - Issued to endorse U.S. Nuclear Regulatory Commission Certificate of Compliance No. 9248, Revision 24.

**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**

a. CERTIFICATE NUMBER 9248	b. REVISION NUMBER 24	c. DOCKET NUMBER 71-9248	d. PACKAGE IDENTIFICATION NUMBER USA/9248/AF	PAGE 1	PAGES OF 7
-------------------------------	--------------------------	-----------------------------	---	-----------	---------------

2. PREAMBLE

- a. This certificate is issued to certify that the package (packaging and contents) described in Item 5 below meets the applicable safety standards set forth in Title 10, Code of Federal Regulations, Part 71, "Packaging and Transportation of Radioactive Material."
- b. This certificate does not relieve the consignor from compliance with any requirement of the regulations of the U.S. Department of Transportation or other applicable regulatory agencies, including the government of any country through or into which the package will be transported.

3. THIS CERTIFICATE IS ISSUED ON THE BASIS OF A SAFETY ANALYSIS REPORT OF THE PACKAGE DESIGN OR APPLICATION

- |   |  |
|---|--|
| a. ISSUED TO ( <i>Name and Address</i> )<br>TN Americas LLC<br>7135 Minstrel Way<br>Suite 300<br>Columbia, MD 21045 | b. TITLE AND IDENTIFICATION OF REPORT OR APPLICATION<br>Framatome ANP, Inc. application<br>dated September 5, 2003, as supplemented. |
|---|--|

4. CONDITIONS

This certificate is conditional upon fulfilling the requirements of 10 CFR Part 71, as applicable, and the conditions specified below.

5.

(a) Packaging

(1) Model Nos.: SP-1, SP-2, and SP-3

(2) Description

Fuel assembly and fuel rod shipping containers. The packages consist of a right rectangular metal inner container and a wooden outer container, with cushioning material between the inner and outer containers.

The metal inner container is approximately 11-1/2 inches by 18 inches by 179-1/2 inches long and is positioned within a wooden outer container approximately 30 inches by 31 inches by 207 inches long. The SP-1 and SP-2 packagings differ in the length of the metal inner container and end piece. The SP-3 packagings have a reduced spacing between the fuel assembly channels and the outer surface of the metal inner container. Cushioning is provided between the inner and outer containers by phenolic impregnated honeycomb and ethafoam, or equivalent. Closure of the metal inner container and the wooden outer container is accomplished by bolts. A pressure relief (breather) valve is provided on the inner container, and is set for 0.5 psi differential. The maximum weight of the packaging and contents is 2,800 pounds.

**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**

a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGES
9248	24	71-9248	USA/9248/AF	2 OF	7

5.(a) (3) Drawings

The packagings are fabricated and assembled in accordance with the following Framatome ANP, Inc., and Siemens Nuclear Power Corporation/Advanced Nuclear Fuels Corporation Drawing Nos.:

EMF-304,416, Rev. 14.  
EMF-306,272, Rev. 10.  
EMF-309,141, Rev. 1.

5.(a) (4) Product Containers

- (i) Five-inch Schedule 40 stainless steel pipe fitted with screw type or flange closure. The product container shall be vented if it contains materials which decompose at less than 1475 °F.
- (ii) Rod shipping container as shown on Siemens Power Corporation Drawing No. EMF-309,141, Rev. 1.

5.(b) Contents

(1) Type and form of material

- (i) UO<sub>2</sub> fuel assemblies in a 7 x 7, an 8 x 8, or a 9 x 9 square array with a maximum fuel cross-section area of 25 in<sup>2</sup>, maximum fuel length of 174 inches, and maximum average enrichment of 3.3 wt.% U-235. Minimum Zircaloy clad thickness is 0.025 inches; maximum pellet diameter is 0.555 inches. Any number of water rods in any arrangement is permitted.
- (ii) UO<sub>2</sub> fuel assemblies in a 7 x 7, an 8 x 8, or a 9 x 9 square array with a maximum fuel length of 174 inches, and a maximum average enrichment between 3.3 to 4.0 wt.% U-235. The maximum pellet diameter is 0.555 inch, and the minimum clad thickness is 0.025 inch. Any number of water rods in any arrangement is permitted, including part length rods. Each assembly contains at least 4 rods with nominal 2 wt.% Gd<sub>2</sub>O<sub>3</sub>, which are in non-perimeter locations and are symmetric about the diagonal.
- (iii) UO<sub>2</sub> fuel assemblies with a maximum U-235 enrichment of 5.0 wt.%, and a maximum average U-235 planar enrichment of 4.0 wt.%. Each fuel assembly is made up of fuel rods in a 10 x 10 square array, with a maximum fuel cross section area of 25.221 in<sup>2</sup>, a nominal pitch of 0.511 inch, and a maximum fuel length of 174 inches. The maximum pellet diameter is 0.3356 inch, the minimum clad thickness is 0.0225 inch, and the maximum U-235 enrichment in any edge rod is 4.0 wt.%. Each assembly contains at least 6 rods with nominal 2 wt.% Gd<sub>2</sub>O<sub>3</sub>, which are symmetric about the diagonal, and each assembly contains at least 4 water rods in the 4 central rod positions.

**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**

a. CERTIFICATE NUMBER 9248	b. REVISION NUMBER 24	c. DOCKET NUMBER 71-9248	d. PACKAGE IDENTIFICATION NUMBER USA/9248/AF	PAGE 3	PAGES OF 7
-------------------------------	--------------------------	-----------------------------	---	-----------	---------------

5.(b) (1) Type and form of material (Continued)

- (iv) UO<sub>2</sub> fuel rods with a maximum U-235 enrichment of 5.0 wt.%, and a minimum Gd<sub>2</sub>O<sub>3</sub> content of 1.0 wt.%. The rods may be clad with Zircaloy, steel, or aluminum. The rods have a maximum fuel pellet diameter of 0.5 inch, and a maximum fuel length of 169 inches.
- (v) UO<sub>2</sub> fuel assemblies composed of fuel rods in a 10 x 10 square array, with a maximum fuel cross section area of 25.0 in<sup>2</sup>, and a maximum fuel length of 174 inches. The maximum U-235 enrichment is 5.0 wt.%, the maximum U-235 enrichment for all edge rods is 4.0 wt.%, and the maximum average planar enrichment, excluding perimeter rods and rods containing gadolinia (Gd<sub>2</sub>O<sub>3</sub>), is 4.0 wt.% U-235. The maximum pellet diameter is 0.35 inch, and the minimum clad thickness is 0.018 inch. Each assembly must have a water channel in the central 3 x 3 rod positions. Any number of additional water rods in any arrangement is permitted, including part length rods. Each assembly must include at least twelve rods with a minimum nominal content of 2.0 wt.% gadolinia (Gd<sub>2</sub>O<sub>3</sub>), in a pattern symmetric about one of the assembly diagonals. At least eight of the twelve gadolinia rods must be located in rows 2 and 9, and in columns 2 and 9 of the assembly.
- (vi) UO<sub>2</sub> fuel assemblies composed of fuel rods in a 10 x 10 square array, with a maximum fuel cross section of 25.0 in<sup>2</sup>, and a maximum fuel length of 174 inches. The maximum U-235 enrichment is 5.0 wt.%. The maximum pellet diameter is 0.35 inch, and the minimum clad thickness is 0.018 inch. Each assembly must have a water channel in the central 3 x 3 rod positions. Any number of additional water rods in any arrangement is permitted, including part length rods. Each assembly must include at least eight rods with a minimum nominal gadolinia (Gd<sub>2</sub>O<sub>3</sub>) content of 2.0 wt.% in all axial regions with enriched pellets. Additional gadolinia rod specifications are included in supplement dated April 30, 1996.
- (vii) UO<sub>2</sub> fuel assemblies composed of fuel rods in a 9 x 9 square array, with a maximum fuel cross section of 25.0 in<sup>2</sup>, and a maximum fuel length of 174 inches. The maximum U-235 enrichment is 5.0 wt.%. The maximum pellet diameter is 0.40 inch, and the minimum clad thickness is 0.015 inch. Each assembly must have a water channel in the central 3 x 3 rod positions. Any number of additional water rods in any arrangement is permitted, including part length rods. Each assembly must include at least eight rods with a minimum nominal gadolinia (Gd<sub>2</sub>O<sub>3</sub>) content of 2.0 wt.% in all axial regions with enriched pellets. Additional gadolinia rod specifications are included in supplement dated April 30, 1996.

**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**

a. CERTIFICATE NUMBER 9248	b. REVISION NUMBER 24	c. DOCKET NUMBER 71-9248	d. PACKAGE IDENTIFICATION NUMBER USA/9248/AF	PAGE 4	PAGES OF 7
-------------------------------	--------------------------	-----------------------------	---	-----------	---------------

5.(b) (1) Type and form of material (Continued)

- (viii) UO<sub>2</sub> fuel assemblies composed of fuel rods in a 9 x 9 square array, with a maximum fuel cross-section area of 25.0 in<sup>2</sup>, a maximum fuel length of 174 inches, and a maximum average uranium enrichment of 4.0 wt.% U-235. The nominal pellet diameter is 0.370 inch. At least the center 3 x 3 rod locations must be a water channel. Each assembly must include at least eight rods with a minimum nominal gadolinia (Gd<sub>2</sub>O<sub>3</sub>) content of 2.0 wt. % in all axial regions with enriched pellets. The eight gadolinia rod locations are shown in Figure 1 of the supplement dated July 27, 1999.
- (ix) UO<sub>2</sub> fuel assemblies composed of fuel rods in a 10 x 10 square array, with a maximum fuel cross section area of 25.0 in<sup>2</sup>, and a maximum fuel length of 174 inches. The maximum U-235 enrichment is 5.0 wt.%, the maximum U-235 enrichment for all edge rods is 4.75 wt.%, the maximum U-235 enrichment for the four (4) corner edge rods is 3.05 wt. %, and the maximum U-235 enrichment for the eight (8) edge rods immediately adjacent to the four corner edge rods is 3.55 wt.%. The pellet diameter is between 0.30 and 0.3957 inch. Each assembly must have a water channel in a central 3 x 3 position. Any number of additional water rods in any arrangement is permitted, including part length rods. Each assembly must include at least 10 rods with a minimum nominal content of 2.0 wt.% gadolinia (Gd<sub>2</sub>O<sub>3</sub>) in all axial regions with the enriched pellets, and in a pattern symmetric about one of the assembly diagonals. At least 10 gadolinia rods must be located in rows 2 and 9, and in columns 2 and 9 of the assembly and cannot be immediately adjacent to another one of the 10 gadolinia rods; however, diagonally adjacent is permitted. An additional upper tie plate (UTP) shipping shim may be added between the UTP and the fueled region. This UTP shim may consist of a maximum of 345 g plastic or plastic composite.
- (x) UO<sub>2</sub> fuel assemblies composed of fuel rods in a 10 x 10 square array, with a maximum fuel cross section area of 25.0 in<sup>2</sup> and a maximum fuel length of 174 inches. The maximum uranium enrichment is 2.3 wt.% U-235. The pellet diameter is between 0.30 and 0.3957 inch. Each assembly must have a water channel in a central 3 x 3 position. Any number of additional water rods in any arrangement is permitted, including part length rods. An additional upper tie plate (UTP) shipping shim may be added between the UTP and the fueled region. This UTP shim may consist of a maximum of 345 grams of plastic or plastic composite.

**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**

a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGES
9248	24	71-9248	USA/9248/AF	5 OF	7

5.(b) (2) Maximum quantity of material per package

Total weight of contents (fuel assemblies, or fuel rods and rod shipping containers) not to exceed 1265 pounds. Total quantity of radioactive material within a package may not exceed a Type A quantity.

- (i) For the contents described in 5(b)(1)(i), 5(b)(1)(ii), 5(b)(1)(iii), 5(b)(1)(v), 5(b)(1)(vi), 5(b)(1)(vii), 5(b)(1)(viii), 5(b)(1)(ix), and 5(b)(1)(x):

Two full length fuel assemblies. Two short fuel assemblies may be substituted for each full length fuel assembly provided the two short assemblies are shipped end-to-end and the total fuel length does not exceed 174 inches.

- (ii) For the contents described in 5(b)(1)(iv):

Two product containers specified in 5.(a)(4). Each product container may contain any number of loose fuel rods.

5.(c) Transport Index for Criticality Control (Criticality Safety Index)

Minimum transport index to be shown on label for nuclear criticality control:

- (1) For contents described in 5(b)(1)(i), 5(b)(1)(ii), 5(b)(1)(iii), 5(b)(1)(iv), and 5(b)(1)(viii), and limited in 5(b)(2)(i) and 5(b)(2)(ii): 0.4
- (2) For contents described in 5(b)(1)(v), 5(b)(1)(vi), 5(b)(1)(vii), 5(b)(1)(ix), 5(b)(1)(x), and limited in 5(b)(2)(i): 1.0

6. Each fuel assembly must be unsheathed or must be enclosed in an unsealed, polyethylene sheath which may not extend beyond the ends of the fuel assembly. The ends of the sheath may not be folded or taped in any manner that would prevent the flow of liquids into or out of the sheathed fuel assembly.

7. Polyethylene shipping shims may be inserted between rods within fuel assemblies as follows:

- (a) For contents described in 5(b)(1)(i) and 5(b)(1)(ii), up to a maximum of 0.20 gram H<sub>2</sub>O hydrogen equivalent per cubic centimeter averaged over the assembly.

**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**

a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGES
9248	24	71-9248	USA/9248/AF	6	OF 7

7. Polyethylene shipping shims may be inserted between rods within fuel assemblies as follows (Cont.):
  - (b) For contents described in 5(b)(1)(v), up to a maximum of 0.25 gram H<sub>2</sub>O hydrogen equivalent per cubic centimeter averaged over the assembly.
  - (c) For contents described in 5(b)(1)(viii), up to a maximum volume fraction of 0.13 averaged over the void volume of the assembly.
  - (d) For contents described in 5(b)(1)(iii), 5(b)(1)(vi), and 5(b)(1)(vii), polyethylene shipping shims are not permitted.
  - (e) For contents described in 5(b)(1)(ix) and 5(b)(1)(x), up to a maximum volume fraction of 0.14 averaged over the void volume of the assembly.
8. Only contents described in 5(b)(1)(viii) and 5(b)(1)(ix) are authorized for transport in Model No. SP-3 packages.
9. Maximum average enrichment means the highest average enrichment through any cross sectional plane of the assembly.
10. In addition to the requirements of Subpart G of 10 CFR Part 71:
  - (a) The package must be prepared for shipment and operated in accordance with the Operating Procedures in Chapter 7 of the application dated September 5, 2003, as supplemented.
  - (b) Each packaging must be acceptance tested and maintained in accordance with the Acceptance Tests and Maintenance Program in Chapter 8 of the application dated September 5, 2003, as supplemented.
11. The package authorized by this certificate is hereby authorized for use under the general license provisions of 10 CFR §71.17.
12. Transport by air of fissile material is not authorized.
13. Fabrication of new packagings is not authorized.
14. Revision 23 of this certificate may be used until December 31, 2017.
15. Expiration date: April 30, 2019.



**CERTIFICATE OF COMPLIANCE  
FOR RADIOACTIVE MATERIAL PACKAGES**


a. CERTIFICATE NUMBER	b. REVISION NUMBER	c. DOCKET NUMBER	d. PACKAGE IDENTIFICATION NUMBER	PAGE	PAGES
9248	24	71-9248	USA/9248/AF	7 OF	7

REFERENCES

Framatome ANP, Inc., application dated September 5, 2003.

Supplements dated: September 24, November 6, 2003, June 28, 2012, March 26, 2013, June 27, 2013, January 23 and 27, 2014, and November 18, 2016.

FOR THE U.S. NUCLEAR REGULATORY COMMISSION



John McKirgan, Chief  
Spent Fuel Licensing Branch  
Division of Spent Fuel Management  
Office of Nuclear Material Safety  
and Safeguards

Date: 12/22/16





U.S. Department  
of Transportation

East Building, PHH-23  
1200 New Jersey Avenue SE  
Washington, D.C. 20590

**Pipeline and  
Hazardous Materials  
Safety Administration**

**CERTIFICATE NUMBER:** USA/9248/AF-85, Revision 26

**ORIGINAL REGISTRANT(S):**

Mr. Jim Davis  
Areva - TN Inc  
2101 Horn Rapids Road  
Richland, WA 99352

Ralf Witten  
Areva - TN Inc  
Abteilung ANF-LP  
Advanced Nuclear Fuels GmbH  
Postfach 1485  
Lingen, Niedersachsen 49784  
Germany

Mr. Robert Link  
Areva - TN Inc  
2101 Horn Rapids Road  
Richland, 99352  
USA

Glenn Mathues  
Licensing Engineer (Transportation)  
Areva - TN Inc  
7135 Minstrel Way  
Suite 300  
Columbia, MD 21045

Mike Valenzano  
Director of Transport Operations  
Areva - TN Inc  
7135 Minstrel Way  
Suite 300  
Columbia, MD 21045

Nicolas Guibert  
Project Manager – Front End  
Areva - TN Inc  
7135 Minstrel Way  
Suite 300  
Columbia, MD 21045

**REGISTERED USER(S):**

Glenn Mathues  
Licensing Engineer (Transportation)  
TN Americas LLC  
7135 Minstrel Way Suite 300  
Columbia, MD 21045

Nicolas Guibert  
Project Manager – Front End  
TN Americas LLC  
7135 Minstrel Way Suite 300  
Columbia, MD 21045

Don Shaw  
Licensing Manager  
TN Americas LLC  
7135 Minstrel Way, Suite 300  
Columbia, MD 21045