



U.S. Department
of Transportation

Pipeline and
Hazardous Materials
Safety Administration

East Building, PHH-23
1200 New Jersey Ave, SE
Washington, D.C. 20590

**COMPETENT AUTHORITY CERTIFICATION FOR A
TYPE B(M)F FISSILE
RADIOACTIVE MATERIALS PACKAGE DESIGN
CERTIFICATE USA/9975/B(M)F-96, REVISION 5**

The Competent Authority of the United States certifies that the radioactive material package design described in this certificate satisfies the regulatory requirements for a Type B(M)F package for fissile material as prescribed in the regulations of the International Atomic Energy Agency¹ and the United States of America².

1. Package Identification - 9975.
2. Package Description and Authorized Radioactive Contents - as described in U.S. Department of Energy Certificate of Compliance No. 9975, Revision 14 (attached). The package is designated as a Type B(M)F, since the maximum normal operating pressure is greater than 700kPa (100 psig).
3. Criticality - The minimum criticality safety index is 2.0. The maximum number of packages per conveyance is determined in accordance with Table X of the IAEA regulations cited in this certificate.
4. General Conditions -
 - a. Each user of this certificate must have in his possession a copy of this certificate and all documents necessary to properly prepare the package for transportation. The user shall prepare the package for shipment in accordance with the documentation and applicable regulations.
 - b. Each user of this certificate, other than the original petitioner, shall register his identity in writing to the Office of Engineering and Research, (PHH-23), Pipeline and Hazardous

¹ "Regulations for the Safe Transport of Radioactive Material, 2012 Edition, No. SSR-6" published by the International Atomic Energy Agency (IAEA), Vienna, Austria.

² Title 49, Code of Federal Regulations, Parts 100-199, United States of America.

CERTIFICATE USA/9975/B(M)F-96, REVISION 5

Materials Safety Administration, U.S. Department of
Transportation, Washington D.C. 20590-0001.

- c. This certificate does not relieve any consignor or carrier from compliance with any requirement of the Government of any country through or into which the package is to be transported.
 - d. This certificate provides no relief from the limitations for transportation of plutonium by air in the United States as cited in the regulations of the U.S. Nuclear Regulatory Commission 10 CFR 71.88.
 - e. Pursuant to Paragraph 558 of the IAEA Regulations, for each shipment made in accordance with this certificate, the shipper shall notify the competent authorities of each country through or into which the shipment is to be transported. The shipper shall ensure that this notification has been received by the competent authority at least 15 days prior to the commencement of the shipment.
 - f. Records of Management System activities required by Paragraph 306 of the IAEA regulations¹ shall be maintained and made available to the authorized officials for at least three years after the last shipment authorized by this certificate. Consignors in the United States exporting shipments under this certificate shall satisfy the applicable requirements of Subpart H of 10 CFR 71.
5. Special Conditions -
- a. Transport by air is not authorized.
6. Marking and Labeling - The package shall bear the marking USA/9975/B(M)F-96 in addition to other required markings and labeling.
7. Expiration Date - This certificate expires on August 31, 2023. Previous editions which have not reached their expiration date may continue to be used.

CERTIFICATE USA/9975/B(M)F-96, REVISION 5


This certificate is issued in accordance with paragraph(s) 813 and 816 of the IAEA Regulations and Section 173.471 and 173.472 of Title 49 of the Code of Federal Regulations, in response to the August 13, 2018 petition by Department of Energy, Washington, DC, and in consideration of other information on file in this Office.

Certified By:



August 31, 2018

(DATE)

 William Schoonover
Associate Administrator for Hazardous
Materials Safety

Revision 5 - Issued to endorse U.S. Department of Energy Certificate of Compliance No. USA/9975/B(M)F-96(DOE), Revision 14 (attached).



U.S. DEPARTMENT OF
ENERGY

DOE Packaging Certification Program

**CERTIFICATE OF COMPLIANCE
For Radioactive Materials Package**

DOE F 5822.1
(5-85 Formerly EV-618)
Rev (9-2011)

1a. Certificate Number	1b. Revision No.	1c. Package Identification No.	1d. Page No.	1e. Total No. Pages
9975	14	USA/9975/B(M)F-96 (DOE)	1	14

2. PREAMBLE

- 2a. This certificate is issued under the authority of 49 CFR Part 173.7(d).
- 2b. The packaging and contents described in item 5 below meet the safety standards set forth in subpart E, "Package Approval Standards" and subpart F, "Package, Special Form, and LSA-III Tests" Title 10, Code of Federal Regulations, Part 71.
- 2c. This certificate does not relieve the consignor from compliance with any requirement of the regulations of the U.S. Department of Transportation or other applicable regulatory agencies, including the government of any country through or into which the package will be transported.

3. This certificate is issued on the basis of a safety analysis report of the package design or application --

(1) Prepared by (Name and Address): U.S. Department of Energy Savannah River Operations Office P.O. Box A Aiken, South Carolina 29808	(2) Title and identification of report or application: Safety Analysis Report for Packaging Model 9975, S-SARP-G-00003, Revision 2, June 2013, as supplemented [See 5(e)].	(3) Date: June 2013
--	---	------------------------

4. CONDITIONS

This certificate is conditional upon the fulfilling of the applicable Operational and Quality Assurance requirements of 49CFR parts 100-199 and 10CFR Part 71, and the conditions specified in item 5 below.

5. Description of Packaging and Authorized Contents, Model Number, Transport Index, Other Conditions, and Supplements:

(a) Packaging

- (1) Model: 9975
- (2) Description:

The components of the packaging include the drum, insulation, bearing plates, primary containment vessel (PCV), secondary containment vessel (SCV), lead shielding, and aluminum honeycomb spacers. An aluminum PCV sleeve or 3013 top and bottom spacer may be used, depending on the type of product can to be transported. The nominal net weight of the packaging ranges from 350-374 lb. The drum is fabricated as a 35-gallon bolted lid drum of 18-gauge Type 304L stainless steel. Four ½-inch diameter vent holes are drilled into the drum, approximately 90 degrees apart, 1 inch below the drum flange and are covered with plastic Caplugs (fusible plugs). The plugging devices prevent water from entering the drum through the vent holes under normal conditions of transport. In the event a fire occurs, the plugs melt, allowing the drum to vent gases generated from the insulation to prevent rupture of the drum. The drum lid is bolted to a 1¼-inches wide by ⅝-inch thick angle flange welded to the top of the drum body using ½-inch high-strength bolts.

6a. Date of Issuance: 08/06/2018	6b. Expiration Date: August 31, 2023
----------------------------------	--------------------------------------

FOR THE U.S. DEPARTMENT OF ENERGY

7a. Address (of DOE Issuing Office) U.S. Department of Energy Office of Packaging and Transportation (EM-4.24) 1000 Independence Avenue, SW Washington, DC 20585	7b. Signature, Name, and Title (of DOE Approving Official) Joanne Lorence Director Headquarters Certifying Official Office of Packaging and Transportation
--	--

Certificate Number	Revision No.	Package Identification No.	Page No.	Total No. Pages
9975	14	USA/9975/B(M)F-96 (DOE)	2	14

The lid is recessed 0.55 inches. A 1/8-inch thick by 1 1/4- inches wide circular ring is welded to the outer section of the lid. The ring serves to reinforce the lid and prevents the lid from shearing away from the bolts during a hypothetical accident condition event. Nuts are tack welded to the flange underside to ease assembly operations. The bolts are tightened to 30 ± 2 ft-lb of torque.

The insulation material that surrounds the containment vessels is fiberboard/Celotex® (cane or softwood, Type IV Grade 1 per ASTM C-208-95, density 14-16 lb/ft³), which is manufactured per ASTM Specification C-208-95. The fiberboard is regular grade wall sheathing material with a nominal density of 15 lb/ft³ and comes in 1/2-inch thick sheets that are bonded together into top and bottom subassemblies with a water-based carpenter's glue. The insulation subassemblies are fitted to the drum so that the radial clearances between the insulation, the lead cylinder, and the drum do not exceed 1/4 inch. The radial thickness of the insulation is 4 3/4 inches. In the axial direction, the top thickness of fiberboard/Celotex® is 3.5 inches and the bottom thickness is 3.4 inches. Placed over and glued to the top fiberboard/Celotex® subassembly is an air shield made of stainless steel.

A 1/2-inch thick Firemaster® encapsulated blanket is placed between the top insulation subassembly and the drum closure lid. The blanket is manufactured from a ceramic fiber (Kaowool®), encapsulated in stainless steel foil and heat-sealed.

Radiation shielding is provided by a shielding assembly (Drawing R-R2-F-0020) that surrounds the PCV/SCV double-containment assembly. The shielding assembly consists of a jacketed cylindrical shielding body subassembly (Drawing R-R2-F-0020-C) and aluminum lid (Drawing R-R2-F-0020-B). The lead of the shielding body is ASTM B-749 or B29 and machined, after casting, to a nominal thickness of 1/2-inch. The shielding body interior and exterior sides and base are covered in 20-gauge 304L stainless steel. The lid of the shielding body is 1/2-inch thick ASTM B-209 1100 aluminum and attaches to the shielding body with four screws. The combined thicknesses of stainless steel in the PCV and SCV closure provide equivalent shielding at the top of the shielding assembly in lieu of lead.

Two 1/2-inch thick aluminum bearing plates are added to the packaging to provide additional load-bearing surfaces against the fiberboard/Celotex® insulation.

The PCV consists of a stainless steel pressure vessel that is designed, analyzed, and fabricated in accordance with Section III, Subsection NB of the ASME Boiler and Pressure Vessel Code (B&PVC), 1992 edition, with a design condition of 900 psig at 300°F. The PCV is fabricated from 5-inch, Schedule 40, seamless, Type 304L stainless steel pipe (0.258-inch nominal wall) and has a standard Schedule 40, Type 304L stainless steel pipe cap (0.258-inch nominal wall) at the blind end. A 304L stainless steel cone seal flange is welded at the open end. Both vessel body joints are circumferential full-penetration butt welds examined by radiographic and liquid penetrant methods. These welds satisfy ASME B&PVC Section III, Subsection NB requirements.

A 4-inch, Schedule 40 pipe of the same material is welded to the convex side of the cap to form a skirt to vertically support the PCV.

The PCV closure consists of a male-female cone joint with surfaces that have been machined to identical angles so that they mate with zero clearance. Two grooves for O-rings have been machined into the face of the Type 304L stainless steel male cone. A leak test port is provided between the two O-ring grooves. A small (0.063-inch wide by 0.06-inch deep) rectangular groove is recessed into the face of the male cone between the two O-ring grooves, to ensure helium detection during leakage testing. Two Viton® GLT and/or Viton® GLT-S fluoroelastomer O-rings (greased with high-vacuum silicone grease) are placed in the grooves to form a leaktight seal (less than 10⁻⁷ ref. cm³/sec air). A Nitronic® 60 seal nut, which forces the male cone against the female cone, is threaded into the containment vessel body. The PCV has a gross internal volume of approximately 313 inch³, weighs 34 lb, and is 18.6 inches long, with a usable inside cavity 15

Certificate Number	Revision No.	Package Identification No.	Page No.	Total No. Pages
9975	14	USA/9975/B(M)F-96 (DOE)	3	14

inches deep with a minimum diameter of 5 inches. For certain oxide contents, the PCV (or PCV and SCV) is backfilled with an inert gas prior to closing.

An aluminum honeycomb spacer is inserted into the concave cavity of the PCV to provide a flat horizontal surface for the product cans. For some containment vessels, an additional bottom spacer is used.

The SCV consists of a stainless steel pressure vessel that is designed, analyzed, and fabricated in accordance with Section III, Subsection NB of the ASME B&PVC, 1992 edition, with design conditions of 800 psig at 300°F. The SCV is fabricated from 6-inch, Schedule 40, seamless, Type 304L stainless steel pipe (0.280-inch nominal wall) and has a standard Schedule 40, Type 304L stainless steel pipe cap (0.280-inch nominal wall) at the blind end. A 304L stainless steel cone seal flange is welded at the open end. Both vessel body joints are circumferential full-penetration butt welds examined by radiographic and liquid penetrant methods. These welds satisfy ASME B&PVC Section III, Subsection NB requirements.


A 5-inch, Schedule 40 pipe of the same material is welded to the convex side of the cap to form a skirt to vertically support the SCV. The SCV closure is identical to that used on the PCV except that the SCV is 1 inch larger in diameter.

The SCV has a gross internal volume of approximately 604 inch³, weighs 56 lb, and is 24 inches long. It has a usable cavity approximately 21.5 in. deep, with a minimum diameter of 6 in.

The aluminum honeycomb impact absorbers that fit axially between the PCV and SCV are fabricated from 3-mil minimum foil thickness. The impact absorbers are rated for an axial compressive strength before deformation of 1500 ± 500 psi. The top impact absorber has the shape of a ring. The bottom impact absorber is machined on the bottom face to roughly fit the contour of the inside of the SCV.

In some cases for Content Envelope C.9, a small or large bore shielded-pig convenience container configuration is used for added shielding [see Drawings 5(a)(3)]. Both configurations consist of machined lead pig in an aluminum convenience can that is placed inside the PCV, between top and bottom aluminum honeycomb spacers, as shown in Figures A.1.8 and A.1.9 of S-SARA-G-00019, Rev. 1 [CoC supplement 5(e)(9)].

Option to use the radiofrequency identification (RFID) system: The option to use the ARG-US RFID system is authorized. The RFID guide [See 5(e)(2)] provides procedures for using the ARG-US RFID system. The ARG-US RFID tag is not considered a part of the package. The ARG-US RFID tag is equipped with a suite of sensors to monitor seal integrity, temperature, humidity, shock, radiation, and battery status. The seal sensor is a thin flexible membrane that sits under the flange bolts of the drum cover when installed. The seal sensor may be credited as a Tamper-Indicating Device (TID) for enhanced security and safeguards, and the seal has been evaluated, and judged to be adequate, following the NRC Regulatory Guide 5.80 "Pressure Sensitive (PS) and Tamper Indicating Device Seals for Material Control and Accounting (MC&A) of Special Nuclear Material," dated December 2010. Therefore, the ARG-US RFID tag may be used as TID seal [See 5(e)(3)]. The ARG-US RFID tag has a robust plastic front cover and the stainless-steel back plate which provide adequate protection of the tag against damage under normal handling and transport. The tag weighs approximately 2.4 lb (with four batteries) and is approximately 8 inches wide x 7 inches high x 1.5 inches tall. Appendix B of the RFID guide provides documentation that the batteries used in the ARG-US RFID tag are not subject to the hazardous material regulations and also contains the Material/Product Safety Data Sheet for the batteries.

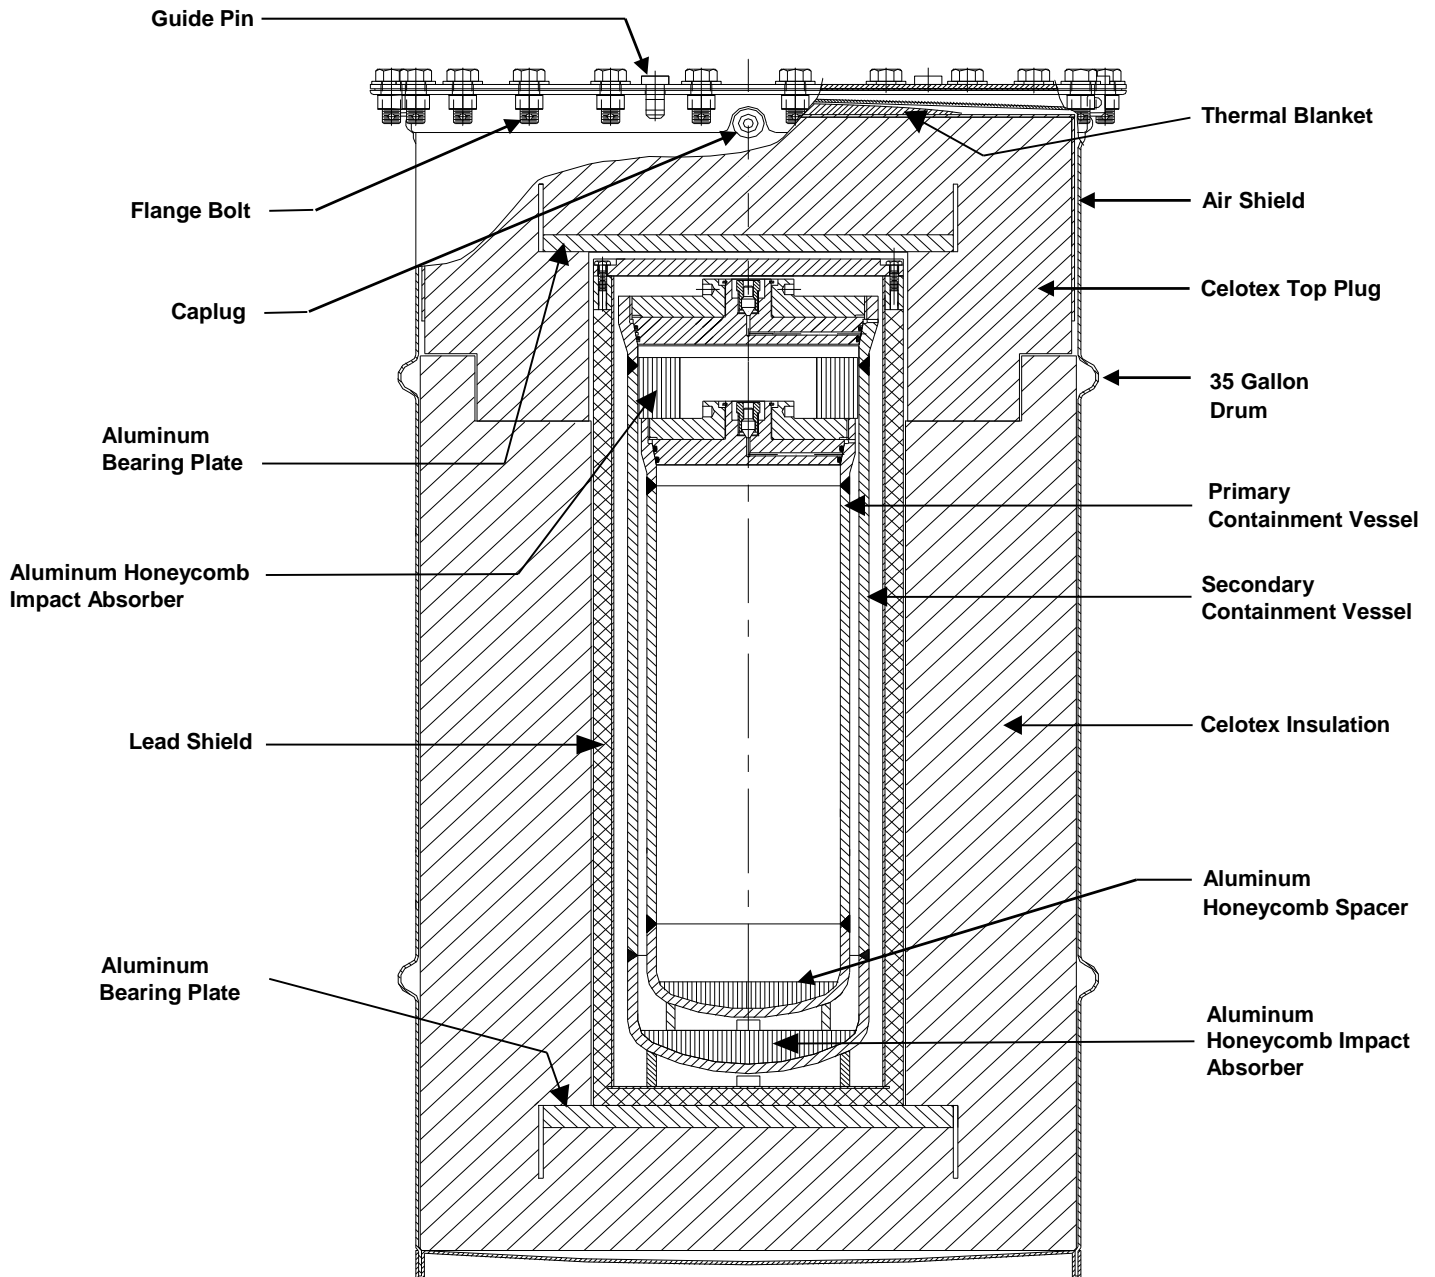

9975 PACKAGING

(3) Drawings:

The packaging design is defined by the following Savannah River Site drawings:

Drawing No.	Rev	Title/Notes
R-R2-F-0026	5	9975 Shipping Package Drum with Flange Closure Assembly (U)
R-R2-F-0019	8	9975 Shipping Package Insulation Assembly, Subassemblies and Details (U)
R-R2-F-0020	11	9975 Shipping Package Shielding (U). Note - Only R-R2-F-0020-C, 9975 Jacketed Steel Body Subassembly, is authorized; R-R2-F-0020-A, 9975 Steel Body Subassembly is prohibited.
R-R2-F-0025	7	9975 Drum with Flange Closure Subassembly and Details (U) Sheets 1 & 2
R-R2-F-0018	10	9975 Shipping Package Primary and Secondary Containment Vessel Subassemblies (U)
R-R3-F-0016	13	9975 Shipping Package Containment Vessel Weldments (U)
R-R3-F-0015	6	9975 Shipping Package Air Shield Weldment (U)
R-R4-F-0054	14	9975 Shipping Package Primary (PCV) & Secondary (SCV) Containment Vessel Details (U)
R-R4-F-0055	5	9975 Shipping Package PCV Sleeve and 3013 Top Spacer Details (U)
R-R2-F-0037	1	9975 Packaging Alternate 3013 Spacer Components Details (U)
R-R4-G-00047	1	U-233 Lead Pig Details and Subassembly (U)
R-R4-G-00048	1	U-233 Container Details and Subassembly (U)
R-R4-G-00051	3	U-233 Spacers (U)
R-R4-G-00166	0	U-233 Large Bore Lead Pig

(b) Contents:

(1) Type and Form of Material: (See Table 1)

- (i) Uranium metal or oxide as specified in Content Envelope C.1.
- (ii) Plutonium-238 heat sources as specified in Content Envelope C.2.
- (iii) Plutonium and/or uranium metal as specified in Content Envelope C.3 or C.10.
- (iv) Plutonium and/or uranium oxide as specified in Content Envelope C.4 or C.11.
- (v) Plutonium composites as specified in Content Envelope C.5.
- (vi) Plutonium/tantalum composites as specified in Content Envelope C.6.
- (vii) Plutonium-238 oxide/beryllium metal as specified in Content Envelope C.7.
- (viii) Neptunium oxide as specified in Content Envelope C.8.
- (ix) Uranium 233 oxides and metals as specified in Content Envelope C.9.

Table 1 - Content Envelopes

	Material ^{a, b}	C.1 ^{c, d}	C.2	C.3 ^{d, e, f, g}	C.4 ^{e, g, h, i}	C.5 ^{d, f, g, j}	C.6 ^{d, f, k}	C.7	C.8 ^l
		U Metal/Oxide	²³⁸ Pu Heat Sources	Pu/U Metals	Pu/U Oxides	Pu Composites	Pu/Ta Composites	²³⁸ Pu Oxide/Be Metal	Neptunium Oxide
Radioisotope ^m (Weight Percent of Radioactive Material Mass)	²³⁶ Pu	-	1 × 10 ⁻⁴	-	-	-	-	1 × 10 ⁻⁴	-
	²³⁸ Pu ⁿ	-	100	2	2	0.05	0.05	80	5 × 10 ⁻²
	²³⁹ Pu ^o	-	40	100	100	100	100	40	gg
	²⁴⁰ Pu	-	13	50	50	6.5	6.5	13	gg
	²⁴¹ Pu ^{o, p}	-	1	15	15	1	1	1	gg
	²⁴² Pu	-	1.5	5	5	0.1	0.1	1.5	gg
	²⁴¹ Am + ²⁴¹ Pu	-	1	15	15	1	1	1	hh
	²⁴³ Am	-	1 × 10 ⁻⁴	1 × 10 ⁻⁴	1 × 10 ⁻⁴	1 × 10 ⁻⁴	1 × 10 ⁻⁴	1 × 10 ⁻⁴	
	²⁴⁴ Cm	-	1 × 10 ⁻⁴	1 × 10 ⁻⁴	1 × 10 ⁻⁴	1 × 10 ⁻⁴	1 × 10 ⁻⁴	1 × 10 ⁻⁴	
	²³⁷ Np	-	0.5	5.0	5.0	-	-	-	100
	²³² U	1 × 10 ⁻⁵	4 × 10 ⁻⁶	1 × 10 ⁻⁵	1 × 10 ⁻⁵	-	-	-	
	²³³ U ^o	0.5	0.2	0.5	0.5	-	-	-	ii
	²³⁴ U ^q	100	40	100	100	-	-	-	ii
	²³⁵ U ^o	100	40	100	100	-	-	-	ii
	²³⁶ U	40	16	40	40	-	-	-	ii
²³⁸ U	100	40	100	100	-	-	-	ii	
²³² Th	-	10	23 ^x	23 ^x	-	-	-	ii	
Impurities (grams)	Al, B, F, Li, Mg, Na	-	-	r	r	-	-	-	jj
	Be	-	-	500	500	4,400	-	200 ^s	jj
	V	-	-	-	-	4,400	-	-	jj
	Ta	-	-	-	-	4,400	6,000	-	jj
	C	-	-	1,000	1,000	-	-	-	jj
Total Mass (kilograms)	Radioactive Materials	13.5	0.1	4.4	4.4	4.4	2	0.02	6
	Impurities	-	-	3.08 ^t	3.08 ^t	4.4	6 ^{u, v}	0.2	0.15
	All Contents	13.5	0.1	4.4	5	4.4	8	0.22	6.81

Table 1 - Content Envelope (Continued)

	Material ^{a,b}	C.9 ²³³ U Metal/ Oxides grams	C.10 ^{d,e,f,g} P/U Metals grams	C.11 ^{e,g,h,i} Pu/U Oxides grams
Radioisotope ^m (Radioactive Material Mass Grams)	²³⁶ Pu ^z	-	-	-
	²³⁸ Pu ⁿ	-	34	34
	²³⁹ Pu ^o	aa	4400	4400
	²⁴⁰ Pu	bb	1450 ^y	2200
	²⁴¹ Pu ^{o, p}	bb	188.9	188.9
	²⁴² Pu	-	400 ^y	2200
	²⁴¹ Am + ²⁴¹ Pu	bb	188.9	188.9
	²⁴³ Am	-	1.00	1.00
	²⁴⁴ Cm	-	0.0044	0.0044
	²³⁷ Np	-	220	220
	²³² U	0.0018 ^{cc}	0.00044	0.00044
	²³³ U ^o	500 ^{dd}	427	427
	²³⁴ U ^q	aa	4400	4400
	²³⁵ U ^o	aa	4400	4400
	²³⁶ U	4400	2640	2640
²³⁸ U	4400	4400	4400	
²³² Th	-	4400	4400	
Impurities ^{ee} (grams)	Al, B, F, Li, Mg, Na	-	r	r
	Be	-	500	500
	V	-	-	-
	Ta	-	-	-
	C	-	1000	1000
Total Mass (kilograms)	Radioactive Materials	4.4	4.4	4.4
	Impurities	-	3.08 ^t	3.08 ^t
	All Contents	4.4	4.4	5

Certificate Number	Revision No.	Package Identification No.	Page No.	Total No. Pages
9975	14	USA/9975/B(M)F-96 (DOE)	8	14

Table 1 – Table Notes

a	Except as permitted for oxides, all contents shall be dry.
b	Pu/U content bulk density shall be no greater than 19.84 g/cc. No minimum bulk density is specified. However, low bulk densities require dilution of the local atmosphere within the content container by a specific gas (helium or nitrogen) and/or reduction in the allowable decay heat as summarized in Table 3.4 of SARP.
c	Up to 1 gram of plutonium contamination is permitted.
d	Each unclad metal piece shall have a minimum thickness of 1.0 mm (0.04 inches) and a specific surface area less than 100 mm ² /gram (71 in ² /lb) per DOE-STD-3013-2004. A minimum 50-gram mass per metal piece conservatively meets these criteria.
e	Mass limit due to shielding. The heat loading of each mixture needs to be determined. The 188.9 gram limit based on estimate of heat load from WCID-2009-0002 Revision 0.
f	Contents shall be stabilized in accordance with DOE-STD-3013-2004, Section 6.1. Engineered metal materials with intact cladding meet the requirements for stabilized metals under content envelopes C.3 and C.10
g	Plutonium plus uranium mass shall not be less than 30 weight percent of the total content mass.
h	Contents shall be stabilized in accordance with DOE-STD-3013-2004, Section 6.1. Engineered oxide materials with intact cladding meet the requirements for stabilized oxides under content envelopes C.4 and C.11
i	The moisture content of the oxide shall be less than 0.5 weight percent of the total content mass.
j	Depleted Uranium or Enriched Uranium may be substituted for any amount of plutonium on a gram-for gram basis.
k	The Be, V, and Ta each form a composite with the radionuclide content and, as such, are not homogeneously mixed with the Pu. A maximum of 50 pieces of composite material is permitted.
l	Material to be prepared in accordance with WSRC-TR-2003-00388 which limits the moisture content of the material.
m	Maximum amounts by constituent.
n	²³⁸ Pu decays to ²³⁴ U, which will result in significant concentrations of ²³⁴ U over time. ²³⁴ U growth will not adversely impact package performance.
o	Nuclide classified as “fissile” per DOE Good Practices Guide, Criticality Safety Good Practices Program, Guide For DOE Nonreactor Nuclear Facilities, DOE G 421.1-1, 3.79 <i>Fissile Nuclide</i> , 8-25-99.
p	²⁴¹ Pu must be less than ²⁴⁰ Pu.
q	Applies to ²³⁴ U other than ²³⁴ U resulting from ²³⁸ Pu decay.
r	The listed light element impurities have a combined mass limit of 3080 grams minus the mass of Be and C present.
s	The beryllium is assumed to be physically separated from the plutonium oxide. The 200 grams of beryllium can be in any configuration with up to 275 cm ² in direct contact with plutonium contents. The surface area restriction is based on shielding.
t	Total impurity limit is based on the minimum 30% Pu + U mass within DOE-STD-3013-2004. The limit was calculated from the maximum radioactive material mass (4.4 kg). [4.4 kg × 70% = 3.08 kg]

Certificate Number	Revision No.	Package Identification No.	Page No.	Total No. Pages
9975	14	USA/9975/B(M)F-96 (DOE)	9	14

Table 1 – Table Notes (continued)

u	Plutonium mass is assumed bonded to the tantalum (as an outer/inner reflector) and is not readily separable.
v	For analytical purposes there are no mixing assumptions for the Ta with the radionuclide content.
w	Reserved
x	Not to exceed 1000 grams total ²³² Th.
y	The ²⁴⁰ Pu and the ²⁴² Pu mass limits may be adjusted per the equation: $^{242}\text{Pu} + 0.596 ^{240}\text{Pu} < 1290$, Where ²⁴⁰ Pu and ²⁴² Pu are the mass limits in grams.
z	²³⁶ Pu is not expected to be present in significant amounts
aa	These isotopes may be present as long as their contribution as equivalent ²³³ U in the package combined with the actual ²³³ U content present does not exceed the ²³³ U mass content limit. The “equivalent ²³³ U” mass is given by the equation $^{233}\text{U}(\text{eq}) = ^{233}\text{U} + ^{235}\text{U}/1.4 + ^{239}\text{Pu}/0.83$ for the three primary fissile isotopes where each isotope name indicates the mass of that isotope. Any ²³⁴ U present shall be considered ²³³ U for this equation.
bb	Small quantities (< 1 g) of these isotopes may be present as long as the ²⁴⁰ Pu mass exceeds the ²⁴¹ Pu mass, their combined mass is less than the ²³⁹ Pu mass, and these isotopes are treated as ²³⁹ Pu mass in the determination of ²³³ U (eq) mass.
cc	0.0018 grams is the limiting mass of ²³² U based on the 9975 package shielding. The ²³² U mass limit increases to 0.004 grams if the large bore shielded-pig (Drawing R-R4-G-00166) is used or 0.0101 grams if the small bore shielded-pig (Drawing R-R4-G-00047) is used.
dd	This mass value is the minimum subcritical mass limit for ²³³ U (ANSI/ANS-8.1).
ee	When present, nickel is plating used to fix contamination on the welded stainless steel capsule encasing the uranium source material for content envelope C.9
ff	²³⁷ Np must comprise at least 97.5 % weight percent of the Radioactive Material Mass
gg	The listed plutonium isotopes have a combined mass limit of 6.11×10^{-2} wt.% of the Radioactive Material Mass minus the mass of ²³⁸ Pu present
hh	Random material sampling for ²⁴¹ Am has shown that the levels are “Less than Detectable”. Since ²⁴¹ Am is only a shielding concern, conformance to 10 FR 71 dose rate limits shall be demonstrated through the Dose Rate Measurement Methodology described in the 9975 SARP. Therefore the measurement of ²⁴¹ Am is not required. The ²⁴¹ Pu limit in Table note gg applies.
ii	The total amount of all radioisotopes other than neptunium must be less than 2.5 wt.%. For plutonium isotopes, the more restrictive limits of Table note gg apply.
jj	The total non-radioactive impurities must be less than 2.2 wt.% of the neptunium oxide mass.

(2) Maximum Quantity of Material per Package: as specified in Tables 1, 2 or 3.

(i) For all Content Envelopes:

(a) The maximum decay heat per package may not exceed 19 watts. Content envelopes C.4 and C.11 are shown in Table 2 below for the decay heat limits.

Table 2. Requirements for Local Atmosphere Dilution and Decay Heat

C.4 & C.11 Density (g/cm ³)	Local Atmospheres Inside PCV		Maximum Decay Heat (Watts)
	Inside Content Container	Outside Content Container	
2.0 to 19.84	N ₂ or Helium dilution to: ≤ 5% O ₂	≥ 75% CO ₂ ≤ 25% air	19
1.0 to < 2.0	Helium dilution to: ≤ 5% O ₂	↓	19
1.0 to < 2.0	N ₂ dilution to: ≤ 5% O ₂	↓	18
< 1.0	Helium dilution to: ≤ 5% O ₂	↓	18.4
< 1.0	N ₂ dilution to: ≤ 5% O ₂	↓	16.5

The maximum weight of all material (radioactive contents, product cans, spacer, shielded pig, etc.) inside the PCV may not exceed 20.1 kg (44.4 lb).

(c) Except as permitted for oxides, all contents shall be dry.

(d) Pu/U content bulk density shall be no greater than 19.84 g/cc. No minimum bulk density is specified. However, low bulk densities may require dilution of the local atmosphere within the content container by a specific gas (helium or nitrogen) and/or reduction in the allowable decay heat as summarized in Table 3.4 of the SARP. Not applicable to Content Envelope C.9.

(e) Except as stated in Table 1, small concentrations (<1000 ppm each) of other actinides, fission products, decay products, and neutron activation products are permitted.

(ii) For Content Envelope C.1:

(a) Up to 1 gram of plutonium contamination is permitted.

(b) Each metal piece shall have a minimum thickness of 1.0 mm (0.04 inches) and a specific surface area less than 100 mm²/g (71 in²/lb) per DOE-STD-3013-2004.

(iii) For Content Envelopes C.3 or C.10:

(a) Each unclad metal piece shall have a minimum thickness of 1.0 mm (0.04 inches) and a specific surface area less than 100 mm²/g (71 in²/lb) per DOE-STD-3013-2004.

(b) Contents shall be stabilized in accordance with DOE-STD-3013-2004, Section 6.1. Engineered metal materials with intact cladding meet the requirements for stabilized metals under content envelopes C.3 and C.10.

(c) Plutonium plus uranium mass may not be less than 30 weight percent of the total content mass.

(iv) For Content Envelopes C.4 or C.11:

(a) Plutonium plus uranium mass may not be less than 30 weight percent of the total content mass.

(b) Contents shall be stabilized in accordance with DOE-STD-3013-2004, Section 6.1. Engineered oxide materials with intact cladding meet the requirements for stabilized

Certificate Number	Revision No.	Package Identification No.	Page No.	Total No. Pages
9975	14	USA/9975/B(M)F-96 (DOE)	11	14

oxides under content envelopes C.4 and C.11.

- (c) The moisture content of the oxide shall be less than 0.5 weight percent of the total content mass.
 - (d) The PCV sleeve for food-pack can configurations is not required when the outer food-pack can diameter exceeds 4.38 inches and the PCV shall be inerted with nitrogen so that at the time of closure the oxygen content in all void spaces is no greater than 5% by volume [See Addendum, 5(e)(4)]. For oxide contents under this configuration without the PCV sleeve the total mass of empty food-pack cans must be less than 9,000 grams.
- (v) For Content Envelope C.5:
- (a) Each metal piece shall have a minimum thickness of 1.0 mm (0.04 inches) and a specific surface area less than 100 mm²/g (71 in²/lb) per DOE-STD-3013-2004.
 - (b) Contents shall be stabilized in accordance with DOE-STD-3013-2004, Section 6.1.1.
 - (c) Plutonium plus uranium mass may not be less than 30 weight percent of the total content mass.
 - (d) Depleted uranium or enriched uranium may be substituted for any amount of plutonium on a gram-for-gram basis.
- (vi) For Content Envelope C.6:
- (a) Each metal piece shall have a minimum thickness of 1.0 mm (0.04 inches) and a specific surface area less than 100 mm²/g (71 in²/lb) per DOE-STD-3013-2004.
 - (b) Contents shall be stabilized in accordance with DOE-STD-3013-2004, Section 6.1.1.
 - (c) A maximum of 50 pieces of composite material is permitted.
- (vii) For Content Envelope C.7:
- (a) The 200 grams of beryllium can be in any configuration with up to 275 cm² in direct contact with plutonium contents.
- (viii) For Content Envelope C.8:
- (a) Material shall be prepared in accordance with WSRC-TR-2003-00388, which limits the moisture content of the material.
 - (b) A total of 100 grams of plastic may be present as low-density polyethylene bags or nylon bagging and polyvinyl chloride tape.
 - (c) Use of the PCV sleeve or aluminum foil packing material is prohibited.
 - (d) Metal mass of food-pack cans is restricted to 1,000 grams.
 - (e) ²⁴⁰Pu content must be greater than the ²⁴¹Pu content.
 - (f) The measured Loss on Ignition (LOI) of the product must be less than 0.24 wt. %.
 - (g) Neptunium Oxide content must have a measured assay of at least 86.2 wt. % neptunium, which corresponds to at least 97.5% neptunium of the total radioactive material.
 - (h) The total plutonium content must not exceed 611 micrograms per gram of neptunium.
 - (i) The total plutonium α (alpha) activity must not exceed 8,580 microcuries per gram of neptunium.
 - (j) The total non-radioactive impurities must be less than 2.2 wt. % of the oxide mass.
 - (j) All containers (food-pack cans, PCV, and SCV) shall be inerted with argon, such that

Certificate Number	Revision No.	Package Identification No.	Page No.	Total No. Pages
9975	14	USA/9975/B(M)F-96 (DOE)	12	14

oxygen content in all void spaces is no greater than 3% by volume at closure.

(ix) For Content Envelope C.9:

- (a) PCV bottom spacer is required.
- (b) Shipments are not authorized in a 3013 or Hex-can
- (c) If ≤ 0.0018 grams ^{232}U contents can be in Food-Pack Can. The food-pack can have a maximum of 100 g plastic. Aluminum pellets or foil for packaging is allowed. Oxide contents must be calcined to at least 600°C and encapsulated in stainless steel or nickel alloy.
- (d) If the mass of U-232 exceeds 0.0018 grams the small or large bore shielded-pig configurations may be used subject to the following: the large bore shielded-pig configuration may be used if the U-232 mass does not exceed 0.004 grams or the small bore shielded-pig configuration may be used if the U-232 mass does not exceed 0.0101 grams.

(x) For the shipment of plutonium/uranium mixed oxide in plastic bottles [See Addendum 5(e)(5)]: A typical plastic bottle configuration within the PCV for plutonium oxide contents is shown in Figure 1.1 of the June 2013 Addendum [See 5(e)(5)]. The maximum content loading for packages with plastic bottle configurations is 2,314 grams of plutonium/uranium mixed oxide with up to 410 grams of Plutonium as Pu-239, and 1,580 grams of Uranium as U-235. The radionuclide isotopic distribution is limited to that described in Table 1, Column C.4. Non radionuclide impurities are limited to those described in Table 1, Column C.4. Radionuclides not described in Table 1, Column C.4 are limited to 1000 ppm. The following conditions apply.

- (a) The maximum amount of plastic materials in the PCV, including high-density polyethylene, low-density polyethylene, or polyvinyl chloride bottles, low-density polyethylene bagging, and polyvinyl chloride tape, shall be no more than 200 grams.
- (b) The plastic bottle shall be placed into a filtered stainless steel or tin-plated carbon steel can. The filtered can shall have a particle removal efficiency of greater than 99% for 5-micron or larger particulates. A perforated stainless steel or tin-plated carbon steel can shall be placed below the filtered can, as a dunnage.
- (c) Only one 1,000-mL plastic bottle can be loaded into a 9975 package. The maximum amount of PuO_2 shall be less than 240 grams in each 9975 package.
- (d) There must be free communication of gases between the PCV, the steel cans, the plastic bags, and the plastic bottle placed into the PCV.
- (e) At the time of closure of the PCV, all void spaces in the PCV, including the void spaces inside the steel cans, the plastic bottles and the plastic bags, shall be inerted with nitrogen so that the initial oxygen concentration is below a selected value of either 1 vol. % or 2 vol. %.
- (f) The shipping period of the 9975 package shall be determined on the basis of the moisture level in the mixed oxide (MOX) and the initial oxygen concentration, as shown in Table 3. The shipping period is from the time of PCV closure to the time of delivery.

Table. 3 – Shipping Period Based on Nitrogen Inerting, Moisture Level in MOX, and Initial Oxygen Concentration

Moisture (wt.%)	Shipping Period (Days)	
	1% initial O ₂ (10,000 ppm)	2% initial O ₂ (20,000 ppm)
2.42	18	12
2.0	23	15
1.5	32	20
1.0	51	33
.54	115	74
.50	129	83

(c) Criticality Safety Index: 2.0

(d) Conditions:

- (1) Content envelope loading arrangements/configurations shall comply with the applicable requirements of Sections 1.2.3.1 and 1.2.3.2 of the SARP, as supplemented by 5(e) of this certificate.
- (2) Food-pack cans with organic liners may not be used for any contents.
- (3) All food-pack, 3013, or hex cans must be examined for post-sealing bulging or buckling prior to placement inside the PCV. No can that has visibly bulged or buckled may be transported in the package.
- (4) Inspect radioactive material outer product containers, i.e., food-pack, 3013, or hex cans, upon removal from the PCV after shipment. Any visible bulging, buckling, or evidence of corrosion on the exterior shall be reported to the Design Agency (DA). The DA shall report to the DOE Headquarters Certifying Official any condition the DA deems significant to safety.
- (5) The gross weight of the package may not exceed 404 lb.
- (6) For the contents described in 5(b)(1)(v), any package that is subjected to an impact greater than that of a four-foot drop shall be surveyed for neutron dose rate prior to contact or handling.
- (7) In addition to the requirements of Subparts G and H of 10 CFR Part 71, and except as specified in section 5(d) of this certificate, each package must be fabricated, acceptance tested, operated, and maintained in accordance with the Operating Procedures requirements of Chapter 7, Acceptance Tests and Maintenance Program requirements of Chapter 8, and packaging-specific Quality Assurance requirements of Chapter 9 of the SARP, as supplemented by 5(e) of this certificate.
- (8) Transport by air of fissile material is not authorized.
- (9) If the option is chosen to attach a ARG-US RFID tag to the 9975 packaging, the operating procedures must follow the additional steps per Chapter 7 of the SARP, and the guide to RFID monitoring system [See 5(e)(2) and 5(e)(3)]. The RFID guide contains a copy of the Material/Product Safety Data Sheet for the batteries used in the ARG-US RFID tag, which provides guidance on the safe use of the batteries.
- (10) Reserved.
- (11) 9975-85 packaging must be upgraded to 9975-96 packaging in accordance with Section 8.2 of the SARP, prior to use for transport.
- (12) All commercial-grade dedication shall be approved by the design authority.

Certificate Number	Revision No.	Package Identification No.	Page No.	Total No. Pages
9975	14	USA/9975/B(M)F-96 (DOE)	14	14

- (13) Revision 13 of this certificate may be used until August 31, 2019 for domestic shipments of 9975-96 packages. Revision 13 of this certificate may be used until August 31, 2019 when endorsed by DOT Competent Authority Certification (certificate) for international shipments to the USA of 9975-96 packages.
- (14) For the shipment of plutonium/uranium mixed oxides in plastic bottles as detailed in 5(b)(2)(x) and Addendum referenced in 5(e)(5), all conditions listed in section 5(b)(2)(x) shall be followed. The Addendum Conditions 1 and 2 in Chapter 1 on page 7 of 54 are not authorized for use. Only 9975 packages certified as "-96" packages shall be used for these shipments. If an abnormality is detected during or after shipment and prior to or upon opening the PCV, or if the shipping period specified in Table 3 is violated, the package shall be placed in a secure area, and a non-conformance report shall be written, evaluated, and dispositioned. In addition, the regulatory agency having jurisdiction shall be notified. When used outside of the United States, the applicable regulatory authority shall review and approve in writing the approval conditions listed in section 5(b)(2)(x).
- (15) Only DOE elements or persons working under contract to DOE elements shall consign the package for shipment.
- (16) Nuclear Regulatory Commission (NRC) or Agreement State licensees shall not consign a DOE certified package for shipment, but can transfer the material on-site to DOE elements or persons working under contract to DOE elements for consignment of the package.
- (e) Supplements:
- (1) Reserved.
 - (2) *Guide to the RFID Monitoring System (Models 9975, 9977, and 9978 Packages)*, Argonne National Laboratory, ANL/DIS-09-5, December 3, 2009.
 - (3) DOE Packaging Certification Program Qualification/Accreditation of ARG-US Tag as TID Seal, July 30, 2012.
 - (4) Justification for Shipment of Plutonium Oxide in Large Vented Food-Pack Cans, Safety Analysis Report for Packaging Model 9975, Addendum, S-SARA-G-00013, Revision 1, May 2011.
 - (5) Safety Analysis Report for Packaging Model 9975, Addendum, Shipment of Plutonium/Uranium Mixed Oxide in Plastic Bottles, S-SARA-G-00015, Revision 3, June 2013
 - (6) Safety Analysis Report for Packaging Model 9975, S-SARP-G-00003, Revision 3, Page Changes, July 2014
 - (7) Safety Analysis Report for Packaging Model 9975, S-SARP-G-00003, Revision 4, Page Changes (final), December 17, 2015 (approval date).
 - (8) Request for Five-Year Renewal of the Certificate of Compliance (CoC) for the Model 9975 Shipping Package, March 8, 2018.
 - (9) Justification for Use of Large Bore Shielded-Pig Convenience Container, Safety Analysis Report for Packaging Model 9975 --Addendum, S-SARA-G-00019, Revision 1, dated June 2018



U.S. Department of
Transportation

**Pipeline and
Hazardous Materials
Safety Administration**

East Building, PHH-23
1200 New Jersey Ave, SE
Washington, D.C. 20590

CERTIFICATE NUMBER: USA/9975/B (M) F-96

ORIGINAL REGISTRANT(S) :

Department of Energy
U.S. Department of Energy
1000 Independence Ave, SW
EM-60
Washington, DC, 20585
USA